

尺寸: 65x70mm

材质: 80g 双铜

印刷: 彩色

Wi-Fi Smoke Detector



*Please read carefully before using; and keep for later reference.

Introduction:

This product is a smart photoelectric smoke sensor, with ultra-low-power MCU design. It is an early warning device, can't detect gas, heat, or fire, nor stop fire or put out fire. It is capable of real-time detecting the presence of smoke. Once detect danger of fire smoke, red LED will be ON, and alarming to alert you and your family timely. It can be widely used in household, lounge, coffee house, dancing hall, and any other places need fire alarm monitoring.

Specifications

Input Voltage: DC3V LR03

Static Current: $\leq 15\mu A$

Alarm Current: $\leq 220mA$

Low-voltage notification: $\leq 2.4V$

Alarm Sound Level: 85db/1m

1

WiFi: 802.11 b/g/n

Detecting Range: 20m²

Installation Method: Ceiling Mounted

Working Temperature: -10℃~+50℃

Working Humidity: $\leq 95\%RH$


Flat Ceiling Mounting

The preferred location to install smoke sensor is in the centre of the ceiling, because smoke, heat and combustible products rise to ceiling and will laterally spread. Keep at least 30cm distance from lights or decorations, and at least 15cm away from walls and corners.


Sloping Ceiling Mounting

2

If Ceiling is sloping, please install the smoke sensor at horizontal distance 90cm away from the ceiling top.




Recommended and Avoided Installation Position



Sloping Ceiling Mounting Position


How to use:

1.Clockwise rotation the mounting bracket, take out and prepare to install battery.



3

2. Input 2pcs AAA battery inside, the LED indicator ON and then OFF.



3. Download " SmartLife " App, or Scan below QR code to download.



iOS/Android


4

4. Register a Tuya Smart App account with your mobile phone, and log in. Click "+" at "My Home" or the Mid-blank space to add device, choose Security Sensor, find Sensor (WiFi) and click.




5

5. Press the RESET for more than 5 Seconds with the PIN, the LED indicator flashes quickly, start network configuration automatically. Input the WiFi code to start connecting.

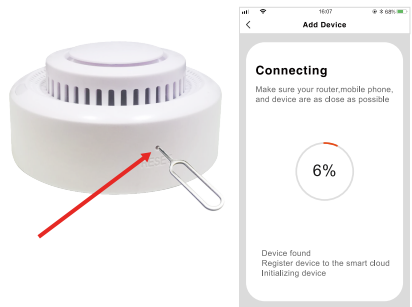


6

6. Press RESET for 5 seconds with PIN when configuration network, indicator flashes slowly, start manual network configuration mode. Input WiFi account and code to add device.

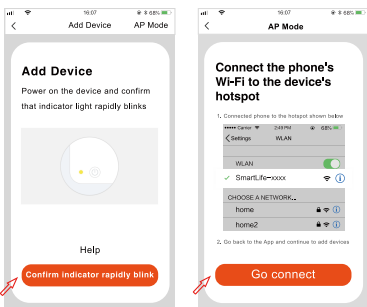

7

7. Configuration network successfully, click smoke detector, long press TEST, buzzer will have DI DI sound, App receive notification " Detecting smoke"; Release TEST, App will show "No Smoke Detected"

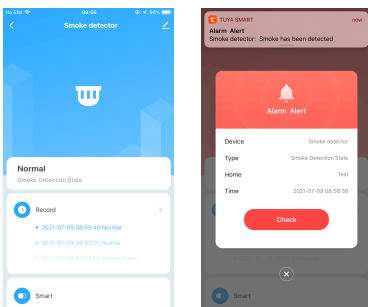

8

8. Mute function

Please make sure there is no real danger of fire when using mute function. Under known and non-fire alarm condition, please do not block or by any other form to prohibit alarming. Press the Test/Mute button to lower sensitivity and relieve alarm.

Test: To burn cotton produces smoke and face the smoke detector. When smoke detector have DiDi alarm, press TEST/MUTE to stop alarming. Please do not use flame to do the test.

9. State and Trouble Shooting

State	LED	Sound Alarm
Normal	Blue LED flashes every 40 seconds	No

9

Test	Blue LED light flashes quickly	Rapid 'Di-Di-Di'
Alarm	Blue LED light flashes quickly	Rapid 'Di-Di-Di'
Low Power	APP pushes low battery reminder	No
Standby	Test alarm wait 15 seconds	No
Auto Network Configuration	LED Indicator flashes every 1 second	No
Manual Network Configuration	LED Indicator flashes every 3 seconds	No
Failure mode	None	every 40 seconds drip twice

10

10. If the smoke detector can't work normally, please do checking as follow:

1. If the battery has been used over, so please replace battery timely.
2. Please clean the smoke detector timely.
3. If correct installing the mounting bracket.
4. Smoke alarming (TEST) has no notification, please make sure the distance from installing place to router is within 10 meters.
5. After the equipment is powered on, the tamper is invalid, you need to short press the reset button or long press the test button to activate the tamper switch.

11