DTECH®

Guangzhou Dtech Electronics Technology Co.,Ltd

2018



Company Profile

Guangzhou Dtech Electronics Technology Co.,Ltd was founded in 2000,located in Guangzhou China.It is 18,000 square meters and more than 150 staffs,strictly comply with ISO9001:2008 standard.

DTECH is specialized in audio&video research, development, manufacture and sales, which integrates R&D department,ODM department and a strong sales network. Products are certified by:HDMI Adopter,CE,FCC,ROHS etc.

Main business:HDMI/VGA/DVI/USB extender,splitter,switch,matrix,converter,KVM switch,audio series,cables and OEM,ODM orders.

CONTENT

TYPE-C SERIES ..... 6—15

HDMI CABLE ..... 16—20

VGA CABLE ..... 21—23


DP/DVI CABLE ..... 24—30

AUDIO CABLE ..... 31—36

USB CABLE ..... 37—41

USB CONVERTER CABLE ..... 42—49

USB HUB ..... 50—54

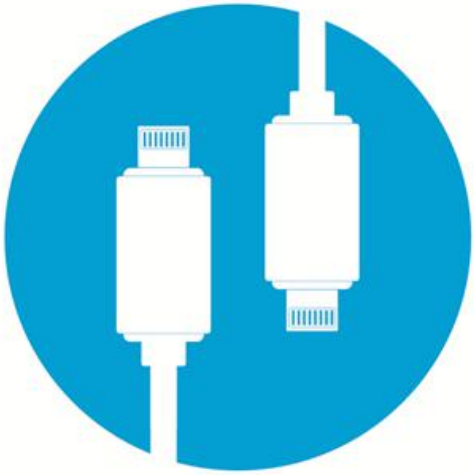

TYPE-C SERIES

- Speed up to 10.2Gbps,USB3.1 standard.
- For MacBook,Goole Computer,ChromeBook,Pixel,etc.
- Double-side pluggable.

TYPE-C Series



TYPE-C to USB 3.0 AF Converter

Model:DT-T0001

- Type-c interface is double-side pluggable,support OTG function.
- Charging data synchronization.
- Compatible with USB1.1/2.0/3.0/3.1 interface devices.

Model	Colour
DT-T0001	Silver
DT-T0001A	gray
DT-T0001B	Gold
DT-T0001C	Rose gold
DT-T0001D	red
DT-T0001E	black




TYPE-C to MICRO 5P Converter

Model:DT-T0002

- Type-c interface is double-side pluggable.
- Charging data synchronization.
- Compatible with USB1.1/2.0/3.0/3.1 interface devices.

Model	Colour
DT-T0002	Silver
DT-T0002A	gray
DT-T0002B	Gold
DT-T0002C	Rose gold
DT-T0002D	red
DT-T0002E	black


TYPE-C Series

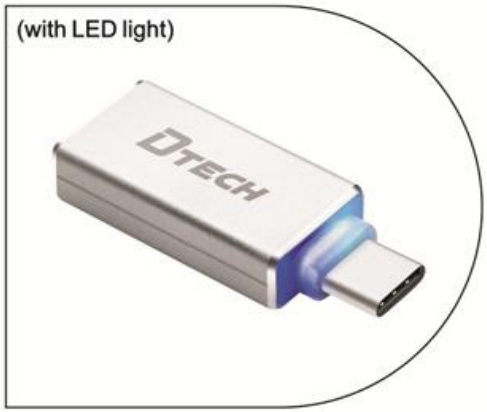

TYPE-C to USB 3.0 AF ADAPTER

Model:DT-T0301


- Comply with USB3.1/3.0/2.0/1.1 agreement.
- Support USB OTG, power and data.
- PTC protection,to gurantee the safety of devices.

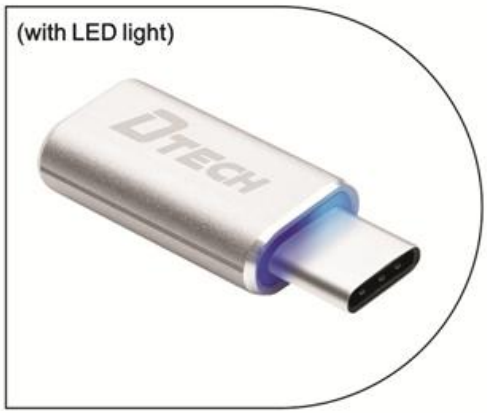

MICRO 5P to TYPE-C ADAPTER

Model:DT-T0302

- Support charging 5V,2A.
- TPE internal mold forming,pull and plug with 10,000 times is affordable.
- PTC protection,to gurantee the safety of devices.

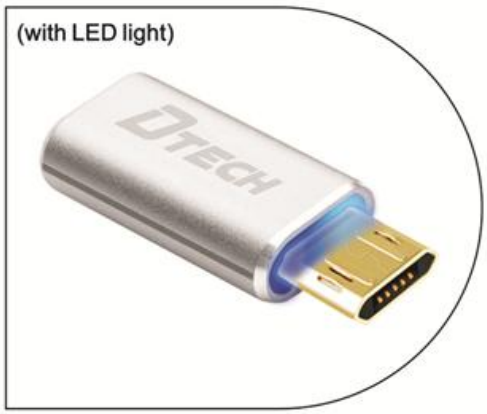

TYPE- C to USB MICRO 5P ADAPTER

Model:DT-T0303

- Support charging 5V,2A.
- TPE internal mold forming,pull and plug with 10,000 times is affordable.
- PTC protection,to gurantee the safety of devices.


TYPE-C Series



TYPE- C to LIGHTING 8P/F ADAPTER

Model:DT-T0304

- Support charging 5V,2A.
- PTC protection,to gurantee the safety of devices.
- Support power charging and transmission to TYPE-C devices.

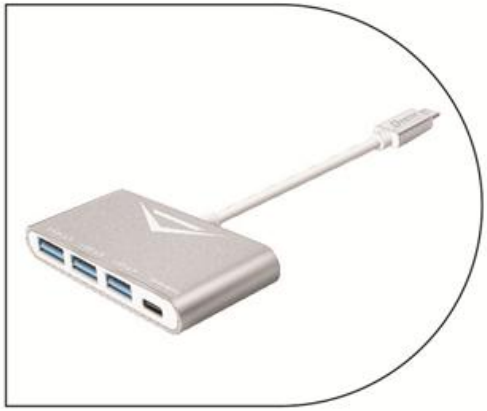

TYPE-C to USB 3.0 3-PORT HUB with PD

Model:DT-T0016A

- TYPE-C interface supports two sides connections.
- USB3.0 transmission 5Gbps,comply with USB2.0/1.1 agreement.
- Support power and data.



TYPE-C to USB 2.0+USB 3.0 HUB

Model:DT-T0018

- TYPE-C interface supports two sides connections.
- Type-C to 2-port USB 2.0+1-port USB3.0,available for more connection.
- USB3.0 transmission 5Gbps.

TYPE-C Series



USB 2.0 AM to TYPE-C Cable

Model:DT-T0009

- USB2.0 to USB3.1 upward compatible.
- Support 490Mbps data transmission and 2.4A charging current.
- High conductivity pure copper cable core.
- Use TPE material,anti-friction,anti-skid,durable and shatter-proof.

Model	Length
DT-T0009	0.1M
DT-T0009	0.5M
DT-T0009	1M
DT-T0009	1.5M
DT-T0009	2M
DT-T0009	3M



USB MICRO BM to TYPE-C 2.0 Cable

Model:DT-T0010

- USB2.0 to USB3.1 upward compatible.
- Support 490Mbps data transmission and 2.4A charging current.
- High conductivity pure copper cable core.
- Use TPE material,anti-friction,anti-skid,durable and shatter-proof.

Model	Length
DT-T0010	0.1M
DT-T0010	0.5M
DT-T0010	1M
DT-T0010	1.5M
DT-T0010	2M
DT-T0010	3M

TYPE-C Series



TYPE-C 2.0 TO Lighting Cable

Model:DT-T0011

- Type-c interface is double-side pluggable,10000 times pull and plug is affordable.
- Support 2.2A quick charging,stable data transmission.
- 480Mbps/s data transmission speed.
- Type-c compatible with Apple lighting 8P connector, comply with IOS association.
- Applicable devices:Mobile phone,Tablet PC,camera,UAV.

Model	Length
DT-T0011	0.1M
DT-T0011	0.5M
DT-T0011	1M
DT-T0011	1.5M
DT-T0011	2M
DT-T0011	3M



TYPE-C 2.0 toTYPE-C Cable

Model:DT-T0012

- Type-c interface is double-side pluggable, 10,000 times pull and plug is affordable.
- 24K gold-plated connector, tinned pure copper core.
- Support 3A quick charging and stable signal transmission.
- Support USB3.1 PD quick charging agreement X.

Model	Length
DT-T0012	0.1M
DT-T0012	0.5M
DT-T0012	1M
DT-T0012	1.5M
DT-T0012	2M
DT-T0012	3M

TYPE-C Series



USB 2.0 AM to Micro 5P Cable

Model:DT-T0013

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Pure copper core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC,mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0013	0.1M
DT-T0013	0.5M
DT-T0013	1M
DT-T0013	1.5M
DT-T0013	2M
DT-T0013	3M




USB 2.0 AM to Lighting Cable

Model:DT-T0014

- Type-c interface is double-side pluggable, 10,000 times pull and plug is affordable.
- 24k gold-plated connector,tinned pure copper cable core.
- Support 3A quick charging and stable signal transmission.

Model	Length
DT-T0014	0.1M
DT-T0014	0.5M
DT-T0014	1M
DT-T0014	1.5M
DT-T0014	2M
DT-T0014	3M

TYPE-C Series

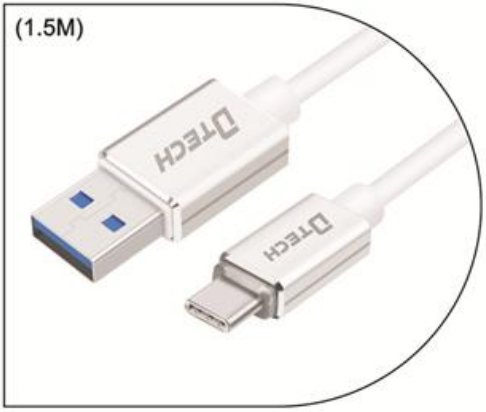

USB 3.0 AM to TYPE-C 3.0 Cable

Model:DT-T0306


- Comply with USB3.1 and USB3.0 agreement.
- TPE internal mold forming,pull and plug with 10,000 times is affordable
- Support power charging and transmission to TYPE-C devices, transmission speed is up to 5Gpbs.



TYPE-C 3.0 to USB 3.0 MICRO BM Cable

Model:DT-T0307

- Comply with USB3.1 and USB3.0 agreement.
- TPE internal mold forming,pull and plug with 10,000 times
- is affordable
  Support power charging and transmission to TYPE-C devices, transmission speed is up to 5Gpbs.

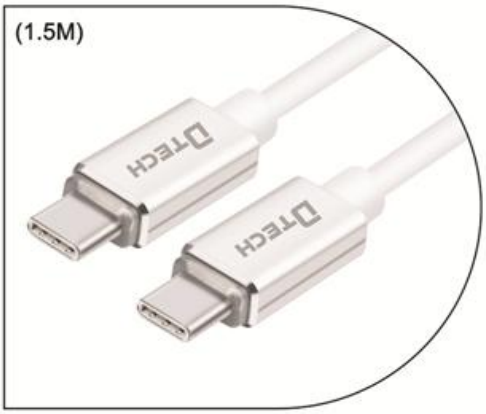

TYPE-C 3.0 to TYPE-C 3.0 Cable

Model:DT-T0308

- Comply with USB3.1 and USB3.0 agreement.
- TPE internal mold forming,pull and plug with 10,000 times
- is affordable
  Support power charging and transmission to TYPE-C devices, transmission speed is up to 5Gpbs.


TYPE-C Series



TYPE-C to 4K HDMI Cable

Model:DT-T0029


- Support video resolution up to 4K*2K@60HZ,backward compatible with 1080p.
- Plug&play,no need external power and driver.
- Gold-plated connector.

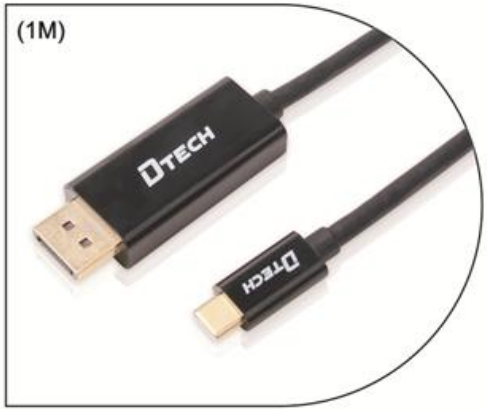

TYPE-C to DP 4K 60HZ Cable

Model:DT-T0030

- Support video resolution up to 4K*2K@60HZ,backward compatible with 1080p.
- Plug&play,no need external power and driver.
- Gold-plated connector.

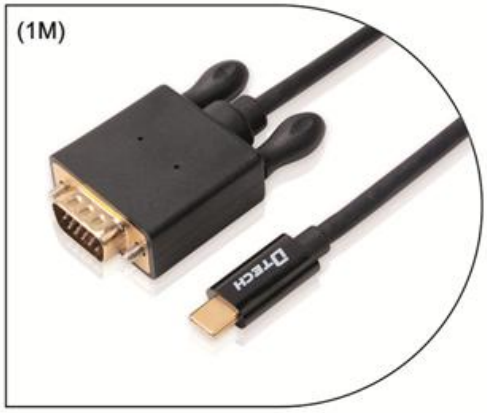

TYPE-C to VGA Cable

Model:DT-T0031

- Support video resolution up to 1920*1080@60HZ.
- Plug&play,no need external power and driver.
- Gold-plated connector.

TYPE-C Series



TYPE-C to USB 2.0 HUB with 10/100Mbps Ethernet

Model:DT-T0024


- Dual chip,stable signal and quick transmission speed.
- Support BC1.2 charging technology, 2.4A fast charging function.
- Type-C to USB2.0 3-port and a 100Mbps Ethernet interface, available for more connection.
- Support Windows XP/Vista/7/8 and MAC.



Type-C to USB 3.0 3-port Hub with Gigabit Ethernet

Model:DT-T0025


- With GL3523+RTL8153 dual chip, stable signal and quick transmission speed.
- TYPE-C interface supports two sides connections.
- NIC adapts to 10/100/1000Mbps.
- Durable aluminum alloy shell.

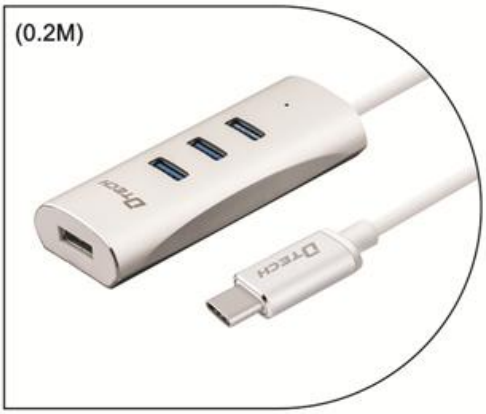

Type-C to USB 3.0 4-port HUB

Model:DT-T0026

- GI3523 chip to support quick charging.
- TYPE-C interface supports two sides connections.
- Exclusive model design.
- Durable aluminum alloy shell.

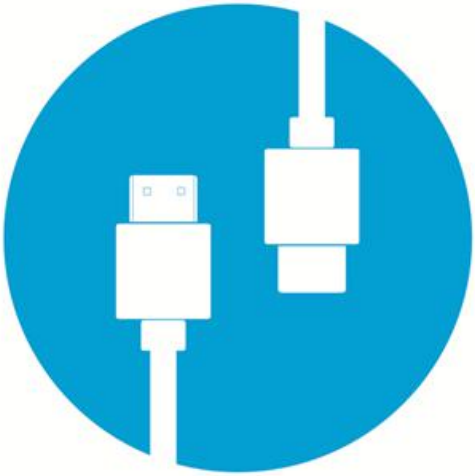

HDMI CABLE

- Support 4K,1080P,3D.
- Gold-Plated connector anti-oxidant.
- Triple shielding,19+1.

HDMI Cable



HDMI Cable

Model:DT-H001

- HDMI 19+1,24K gold-plated connector.
- Support4K,1080p&3D.
- Two aluminum foil and Al-Mg wire braided triple shielding.
- With ROHS and CE compliant.

Model	Length
DT-H001	0.75M
DT-H002	1M
DT-H003	1.5M
DT-H004	2M
DT-H005	3M
DT-H006	5M
DT-H007	8M
DT-H008	10M




HDMI 2.0 Cable

Model:DT-H201

- HDMI 2.0 Version,Support HDCP2.2.
- 18Gbps high speed; 3 lanes in total, 6Gbps/lane.
- Supports 4K resolution@60Hz,3D.
- HDMI 19+1,24K gold-plated connector.

Model	Length
DT-H201	0.5M
DT-H201	1M
DT-H201	1.5M
DT-H201	2M
DT-H201	3M

HDMI Cable

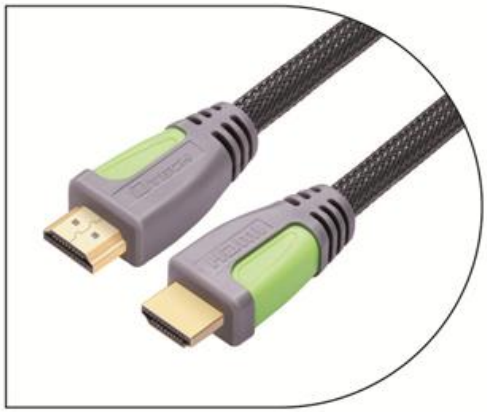

HDMI Cable

Model:DT-6618

- HDMI 19+1,24K gold-plated connector.
- Support,1080p&3D.
- Woven wesh and aluminum foil double shielding.
- With ROHS and CE compliant.

Model	Spec	Length
DT-6618	30AWG	1.8M
DT-6630	30AWG	3M
DT-6650	28AWG	5M
DT-6680	28AWG	8M
DT-6610	28AWG	10M
DT-6615	26AWG	15M
DT-6620	24AWG	20M



HDMI Male to Male Cable(with chipset)

Model:DT-6625C

- HDMI 1.4 built-in signal amplifier chip,AWG24.
- Supports 1920x1080p full HD output format.
- Play operation-no need to set.

Model	Spec	Length
DT-6625C	24AWG	25M
DT-6630C	24AWG	30M
DT-6635C	24AWG	35M
DT-6640C	24AWG	40M
DT-6645C	24AWG	45M
DT-6650C	24AWG	50M

HDMI Cable



HDMI 2.0 AOC fiber cable 4K@60HZ 4:4:4

Model:DT-HF202

- Up to 100m Maximum Length.
- HDMI 2.0 Version;High Speed-18 Gbps,YUV4:4:4.
- Supports up to 1536 kHz audio sample frequency; 32 audio channels.
- 4K support-supports ANY resolution to 4K(4096X2160) @30HZ/60HZ.
- HDCP 2.2;EDID,CEC compliant.

Model	Length
DT-HF202	16M
DT-HF205	31M
DT-HF206	46M
DT-HF209	61M
DT-HF210	92M
DT-HF211	100M




HDMI fiber cable Type D-A 4:4:4

Model:DT-HF302

- Micro HDMI(Type-D) and standard HDMI(Type-A).
- Meets HDMI 2.0 testing standards;18.2Gbps Bandwidth.
- 4K@60Hz/fps YUV(Chroma Subsampling). 4:4:4/4:2:2/4:2:0 at 10bit Support.
- Supports Full 3D; HDCP 2.2; EDID; CEC.

Model	Length
DT-HF302	16M
DT-HF305	31M
DT-HF306	46M
DT-HF309	61M
DT-HF310	92M
DT-HF311	100M

HDMI Cable

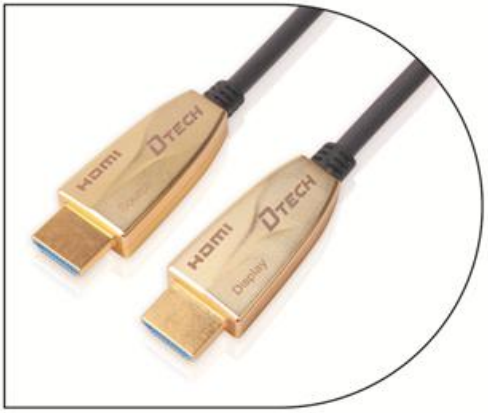


HDM 2.0 AOC fiber cable 4K@60HZ

Model:DT-H503

- Meets HDMI 2.0 testing standards;18.2Gbps Bandwidth.
- 4K@60Hz/fps YUV(Chroma Subsampling) 4:4:4/4:2:2/4:2:0 at 10bit Support.
- Supports Full 3D;HDCP 2.2; EDID; CEC.

Model	Length
DT-503	5M
DT-504	8M
DT-505	10M

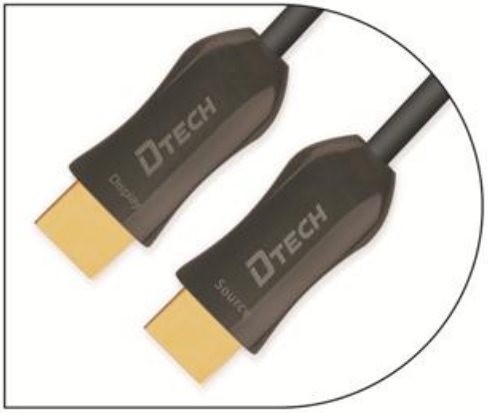


HDM 2.0 AOC fiber cable 4K@60HZ

Model:DT-HF102

- HDMI2.0 Version,High Speed-18Gbps,YUV4:2:0.
- Supports up to1536 kHz audio sample frequency;32 audio channels.
- 4K support-supports ANY resolution to 4K(4096X2160)@30HZ/60HZ.
- HDCP 2.2;EDID,CEC compliant.
- ARC(Audio Return Channel);Ethernet; 48-Bit Deep Color.

Model	Length
DT-HF102	16M
DT-HF105	31M
DT-HF106	46M
DT-HF109	61M
DT-HF110	92M
DT-HF111	100M

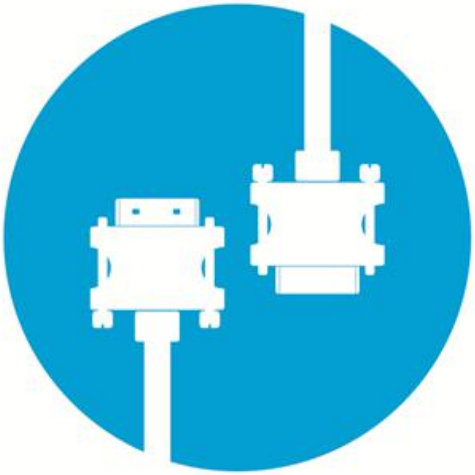

VGA CABLE

- VGA 3+6 Cable.
- Fully shielded and flexible.
- Gold-plated connector.

VGA Cable



VGA 3+6 VGA Cable

Model:DT-V001

- VGA cable 3+6 male to male.
- Triple shielding,good anti-interfacerence.
- Gold-plated connector,anti-oxidant and stable transmission.

Model	Length
DT-V001	1M
DT-V002	1.5M
DT-V003	3M
DT-V004	5M
DT-V005	10M
DT-V006	15M
DT-V007	20M
DT-V008	25M
DT-V009	30M



VGA 3+6 flat Cable

Model:DT-69F18

- VGA flat cable 3+6 male to male.
- Tinned copper interface, oxygen free copper conductor,double aluminum foil shield,ultra high speed signal transmission.
- Gold-plated connector,anti-oxidant and stable transmission.

Model	Length
DT-69F18	1.8M
DT-69F30	3M
DT-69F50	5M
DT-69F10	10M
DT-69F15	15M
DT-69F20	20M

VGA Cable



VGA 3+6 Cable

Model:DT-CB0292

- VGA cable 3+6 male to male.
- Triple shielding, good anti-interference.
- Gold-plated connector, anti-oxidant and stable signal transmission.

Model	Length
CB0292	1.8M
CB0294	3M
CB0296	5M
CB0323	8M
CB0298	10M




VGA 3+6 Cable

Model:DT-CB0300

- VGA flat cable 3+6 male to male.
- Tinned copper interface,oxygen free conductor,double aluminum foil shield and ultra high speed transmission.
- Gold-plated connector, anti-oxidant and stable signal transmission.

Model	Length
CB0300	15M
CB0302	20M
CB0305	25M
CB0307	30M
CB0309	35M

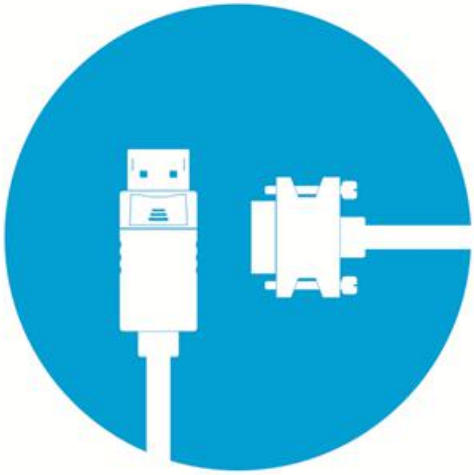

DP/DVI CABLE

- Gold-Plated connector.
- Environmental protection materials.
- Fully shielded flexible and abrasive resistant.

DP Cable



DP to HDMI Cable

Model:DT-CU0305

- Support HDMI resolution up to 1920*1080@60HZ.
- Gold-plated connector, 30AWG, OD=7.3MM.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.

Model	Length
DT-CU0305	1M
DT-CU0305	1.8M
DT-CU0305	3M




DP to DVI Cable 1.8M

Model:DT-CU0306

- Support video resolution up to 1920*1080@60HZ.
- Gold-plated connector, 30AWG, OD=7.3MM.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.

DP Cable

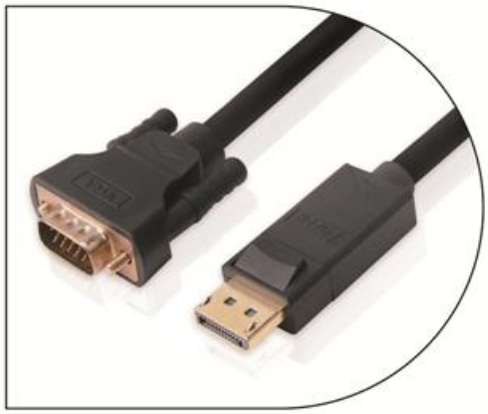

DP to VGA Cable

Model:DT-CU0307

- Support VGA resolution up to 1920*1080@60HZ.
- Gold-plated connector, 30AWG, OD=7.3MM.
- Support Windows XP/Vista/7/8/10,Linux.

Model	Length
DT-CU0307	1M
DT-CU0307	1.8M
DT-CU0307	3M



DP to DP Cable

Model:DT-CU0308

- Support video resolution up to 1920*1080@60HZ.
- Gold-plated connector, 30AWG, OD=7.3MM.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.

Model	Length
DT-CU0308	1M
DT-CU0308	1.8M
DT-CU0308	3M

DP Cable



MINI DP to HDMI Cable

Model:DT-CU0309

- Support video resolution up to 1920*1080@60HZ.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.
- Gold-plated connector.

Model	Length
DT-CU0309	1M
DT-CU0309	1.5M
DT-CU0309	2M
DT-CU0309	3M
DT-CU0309	5M



MINI DP to DVI Cable

Model:DT-CU0310

- Support video resolution up to 1920*1080@60HZ.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.
- Gold-plated connector.

Model	Length
DT-CU0310	1M
DT-CU0310	1.5M
DT-CU0310	2M
DT-CU0310	3M
DT-CU0310	5M

DP Cable



MINI DP to VGA Cable

Model:DT-CU0311

- Support video resolution up to 1920*1080@60HZ;
- Support Windows XP/Vista/7/8/10,Linux.
- Gold-plated connector.

Model	Length
DT-CU0311	1M
DT-CU0311	1.5M
DT-CU0311	2M
DT-CU0311	3M
DT-CU0311	5M




MINI DP to DP Cable

Model:DT-CU0312

- Support video resolution up to 1920*1080@60HZ.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.
- Gold-plated connector.

Model	Length
DT-CU0312	1M
DT-CU0312	1.5M
DT-CU0312	2M
DT-CU0312	3M

DP Cable

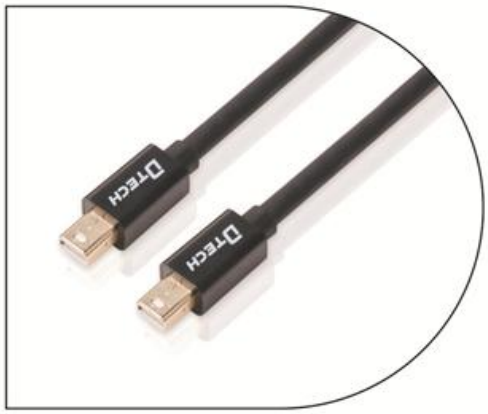

MINI DP to MINI DP Cable

Model:DT-CU0313

- Support video resolution up to 1920*1080@60HZ.
- Support Windows XP/Vista/7/8/10,Linux and Mac OS.
- Gold-plated connector.

Model	Length
DT-CU0313	1M
DT-CU0313	1.5M
DT-CU0313	2M
DT-CU0313	3M

DVI Cable



DVI male to male 18+1 Cable

Model:DT-D1018A

- Support 1080P,1920X1200@60HZ.
- 24K gold plated connector,support PNP and stable signal transmission.
- Wire core using 125% delicated shielding aluminum foil, high density 128 weaving.
- Applicable all devices with DVI interface:HD DVD,PC, set-top box,projector,HD TV,etc.

Model	Length
DT-D1018A	1.8M
DT-D1030A	3M
DT-D1050A	5M
DT-D1010A	10M
DT-D1015A	15M




DVI male to male 18+1 Cablewith IC

Model:DT-D1025C

- Support 1080P,1920X1200@60HZ.
- 24K gold plated connector,support PNP and stable signal transmission.
- Wire core using 125% delicated shielding aluminum foil, high density 128 weaving.
- US imported original chip,ensure the high picture quality in a long distance transmission.
- Applicable all devices with DVI interface:HD DVD,PC,set-top box,projector,HD TV,etc.

Model	Length
DT-D1020C	20M
DT-D1025C	25M
DT-D1030C	30M
DT-D1040C	40M
DT-D1050C	50M

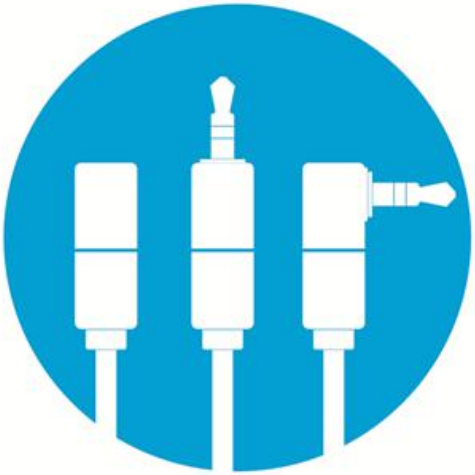

AUDIO CABLE

Audio Cable



3.5mm M to M AUX audio Cable

Model:DT-T0201

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC, mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0201	0.5M
DT-T0202	1M
DT-T0203	1.5M
DT-T0204	2M
DT-T0205	3M



3.5mm M to M (curved to direct) AUX audio Cable

Model:DT-T0209

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC,mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0209	0.1M
DT-T0210	0.5M
DT-T0211	1M
DT-T0212	1.5M
DT-T0213	2M
DT-T0214	3M

Audio Cable



3.5mm M to M (curved to curved) AUX audio Cable 0.1M

Model:DT-T0208

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC,mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.



3.5 stereo 2 M to F converter audio Cable

Model:DT-T0221

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC,mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.



3.5 stereo 2 F to M converter audio Cable

Model:DT-T0222

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC,mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Audio Cable



3.5mm M to F audio extension Cable

Model:DT-T0216

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC, mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0215	0.5M
DT-T0216	1M
DT-T0217	1.5M
DT-T0218	2M
DT-T0219	3M
DT-T0220	5M



3.5mm audio 2 F to M (headset deconcentrator)

Model:DT-T0225

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC, mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0223	0.25M
DT-T0224	0.5M
DT-T0225	1M
DT-T0226	1.5M

Audio Cable



3.5mm to 2 RCA audio Cable

Model:DT-T0228

- 24k gold plated,improve the conductivity.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.
- Applicable for the signal transmission between PC, mobile phone,TV,MP3 devices and speaker,vehicular audio AUX.

Model	Length
DT-T0227	0.5M
DT-T0228	1M
DT-T0229	1.5M
DT-T0230	2M
DT-T0231	3M
DT-T0232	5M



2 RCA to 2 RCA audio Cable

Model:DT-T0234

- 24k gold plated connector,improve the conductivity so the sound is more delicate and exquisite.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.

Model	Length
DT-T0233	0.5M
DT-T0234	1M
DT-T0235	1.5M
DT-T0236	2M
DT-T0237	3M
DT-T0238	5M

Audio Cable



3.5mm F to 2 RCA F audio Cable

Model:DT-T0239

- 24k gold plated connector,improve the conductivity so the sound is more delicate and exquisite.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.



3.5mm M to 2 RCA F audio Cable

Model:DT-T0240


- White means left channel,red is right channel.
- 24k gold plated connector,improve the conductivity so the sound is more delicate and exquisite.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.



3.5mm F to 2RCA M audio Cable

Model:DT-T0241


- White means left channel,red is right channel.
- 24k gold plated connector,improve the conductivity so the sound is more delicate and exquisite.
- PVC Outer covering,with soft texture to keep the signal fidelity and not damaged.
- Copper cable core conductor, tensile and with stable data transmission.

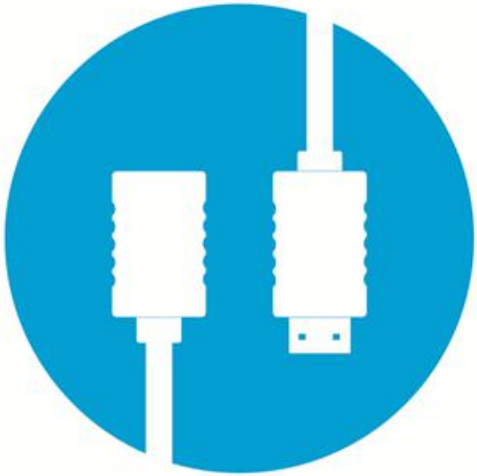

USB CABLE

- Buitt-in USB Chipset.prevent data loss.
- With double ring and Braid.
- Gold-plated USB connectors.

USB Cable

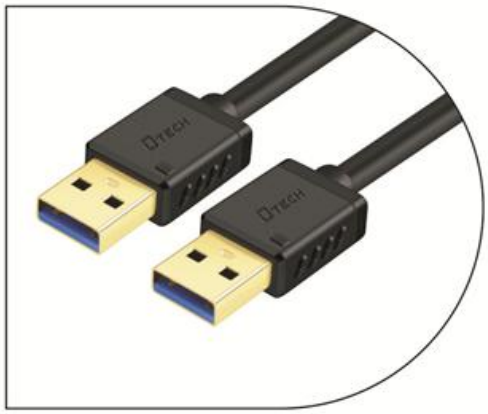

USB 3.0 AM-AM Cable black

Model:DT-CU0301

- USB3.0 support speed up to 5Gbps.
- Backward compatible with USB 2.0/1.1.
- Gold-plated connector.

Model	Length
DT-CU0301	0.25M
DT-CU0301	0.5M
DT-CU0301	1M
DT-CU0301	1.5M
DT-CU0301	2M




USB 3.0 AM-AF Cable black

Model:DT-CU0302

- USB3.0 support speed up to 5Gbps.
- Backward compatible with USB 2.0/1.1.
- Gold-plated connector.

Model	Length
DT-CU0302	0.5M
DT-CU0302	1M
DT-CU0302	1.5M
DT-CU0302	2M
DT-CU0302	3M

USB Cable

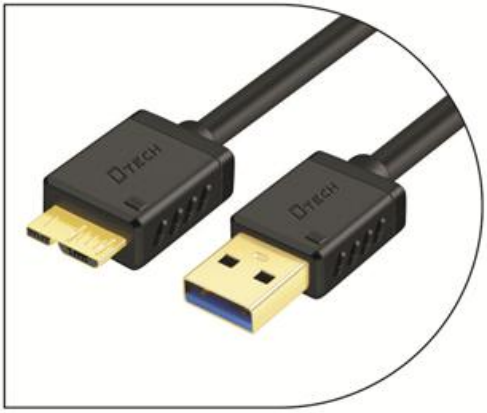


USB 3.0 AM-MICRO USB cable black

Model:DT-CU0303

- USB3.0 support speed up to 5Gbps.
- Backward compatible with USB 2.0/1.1.
- Gold-plated connector.

Model	Length
DT-CU0303	0.25M
DT-CU0303	0.5M
DT-CU0303	1M
DT-CU0303	1.5M
DT-CU0303	2M

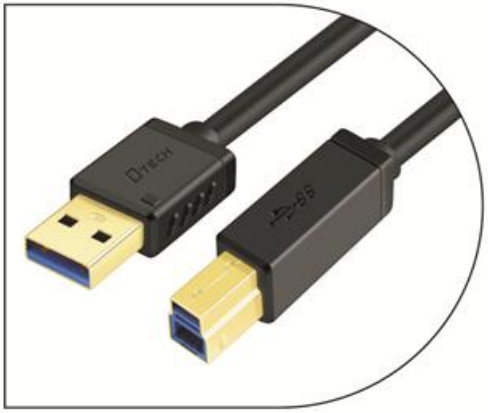


USB 3.0 AM-BM USB cable black

Model:DT-CU0304

- USB3.0 support speed up to 5Gbps.
- Backward compatible with USB 2.0/1.1.
- Gold-plated connector.

Model	Length
DT-CU0304	1M
DT-CU0304	1.5M
DT-CU0304	2M

USB Cable

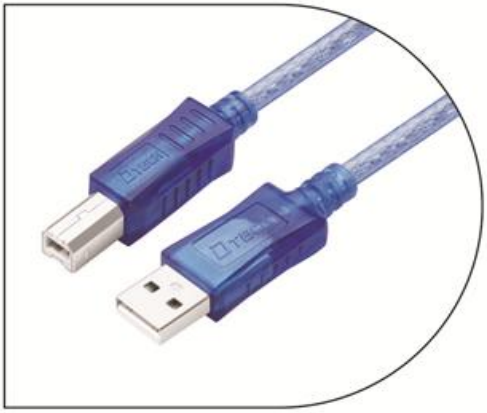

USB 2.0 AM-BM Cable

Model:DT-CU0093

- Standard USB2.0 AM,BM,interface.
- Copper woven mesh and aluminum foil double shielding, good anti-interference.
- 480Mbps maximum transmission speed,compatible with USB1.1

Model	Length
DT-CU0093	1.8M
DT-CU0094	3M
DT-CU0097	5M
DT-CU0114	10M



USB 2.0 AM-AF Cable

Model:DT-CU0065

- Standard USB2.0 AM,BM,interface.
- Copper woven mesh and aluminum foil double shielding, good anti-interference.
- 480Mbps maximum transmission speed,compatible with USB1.1

Model	Length
DT-CU0065	1.8M
DT-CU0035	3M
DT-CU0107	5M
DT-CU0113	10M

USB Cable



USB 2.0 Extension Cable

Model:DT-5037

- Built-in USB chipset can enhance the signal,amplify the.
- Signal cable,to prevent data loss. 28AWG+24AWG tinned copper twisted pair core, to assure data security and communication stability.
- Double magnet ring,enhance signal.

Model	Length
DT-5037	10M
DT-5038	15M




USB 2.0 Extension Cable(active)

Model:DT-5039

- Built-in USB chipset can enhance the signal,amplify the.
- Signal cable,to prevent data loss. 28AWG+24AWG tinned copper twisted pair core, to assure data security and communication stability.
- Double magnet ring,enhance signal.

Model	Length
DT-5039(active)	20M
DT-5042(active)	25M
DT-5043(active)	30M

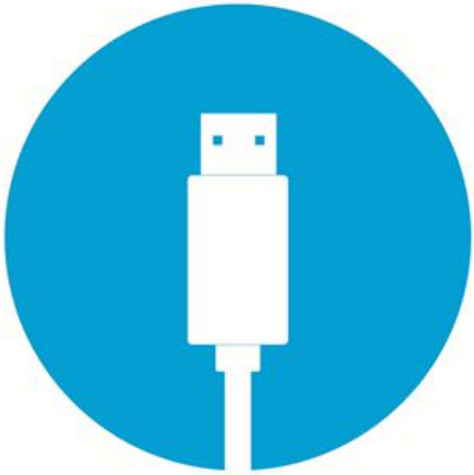

USB CONVERTER CABLE

USB Converter Cable



USB to Serial DB9 Convertor

Model:DT-5001A


- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Support system:WIN98/98SE/ME/XP/VISTA/WIN7/8/10.



USB to Serial DB9 Convertor Cable

Model:DT-5002A

- USB 2.0 Compliant DB9 male adapter.
- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.

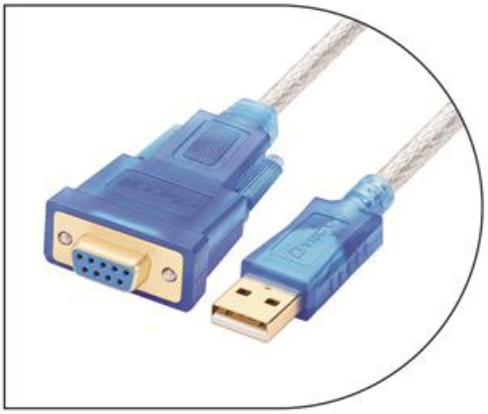

USB2.0 to female serial DB9 Cable

Model:DT-5002B

- USB 2.0 Compliant Db9 female adapter.
- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.


USB Converter Cable



USB to DB9 RS232 Cable with OTG

Model:DT-5002C

- USB 2.0 Compliant DB9 male adapter.
- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.

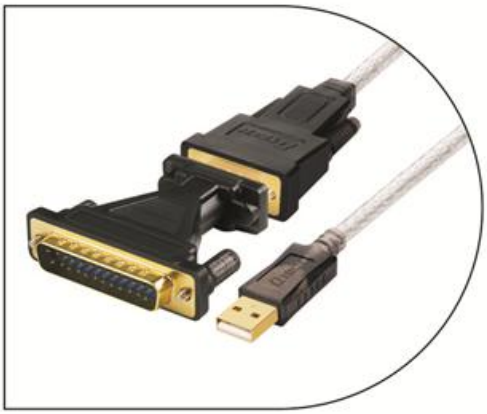


USB to DB9 and DB25 Convertor Cable

Model:DT-5003A

- USB 1.1 and 2.0 compatible.
- IC Solution: Prolific PL 2303.
- Easily Convert a standard USB Port into a DB9 Serial Port.
- Compatible With:Windows 98/ME/2000/XP/Vista/7/8/10, MAC OSX 8.6~9.x,MAC OSX 10.1.x~10.3.x,Linux.

USB Converter Cable

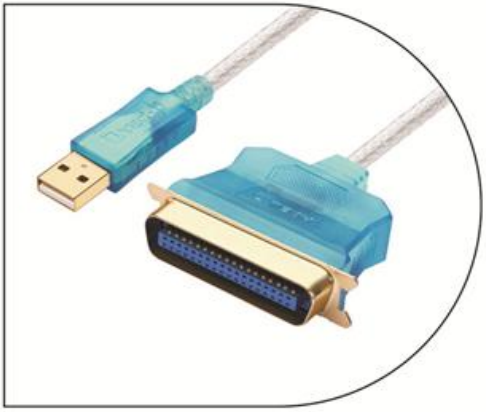


USB to Parallel IEEE 1284(Printer Cable)

Model:DT-5004

- Fully compliant with USB1.0.
- Perfect for the latest Inkjet and Laser Printers.
- Auto-negotiates hardware recognition for faster protocol set-up and supports multiple logical channels.
- Plug&Play.
- Conserves parallel ports for use with scanners, printers, video cameras.
- OS Supports: Windows 98SE, ME, 2000, XP,vista,7,8, 10or MAC OS 8.6 or Greater.

Model	Length
DT-5004	1.8M
DT-5034	3M
DT-5054	5M

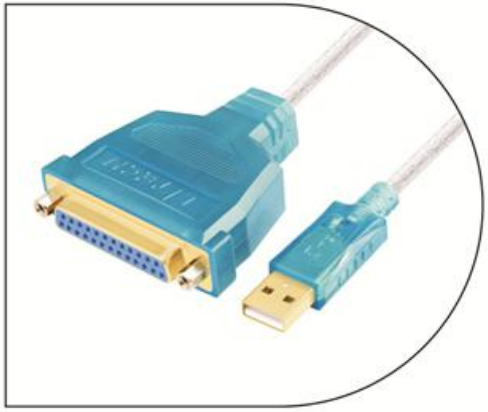


USB to DB25 Parellel Cable

Model:DT-5005

- Support most of major brand printers.
- Up to 12Mbps data transfer rate.
- Bi-directional data transfer over USB to IEEE 1284 allows high speed printing.
- Fully compliant with USB1.1 and IEEE 1284.

Model	Length
DT-5005	1.8M
DT-5035	3M
DT-5055	5M


USB Converter Cable

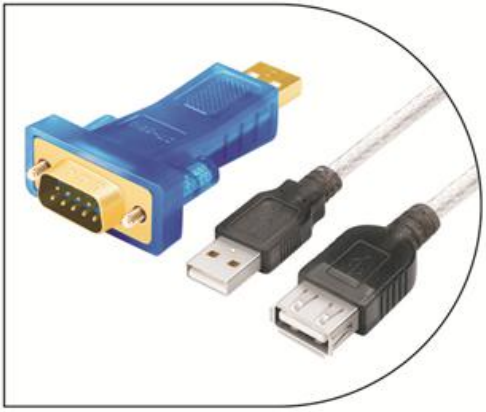

USB to Serial DB9 adapter

Model:DT-5010

- With FTDI chipset.
- Converts USB 2.0 port to RS232 9 Pin Serial port.
- Standard USB2.0 type A male and RS232 serial interface, USB2.0 compliant
- Support Win98, 2000, XP, Vista,7,8,10 & Mac OS V8.6 or higher.

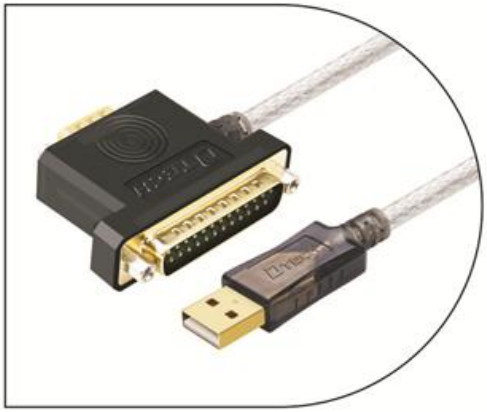


USB 2.0 to female serial DB9 Cable

Model:DT-5018

- Compatible with USB1.1&USB2.0.
- Up to 1Mbps data transfer rate.
- Supports Wake-On-LAN function.
- Supports Windows 98/SE/ME/2000/XP/7/8 and MAC OS9.0/OSX/Linux.
- Ideal for connecting to RS232 devices, label printers, mobile phones.

USB Converter Cable

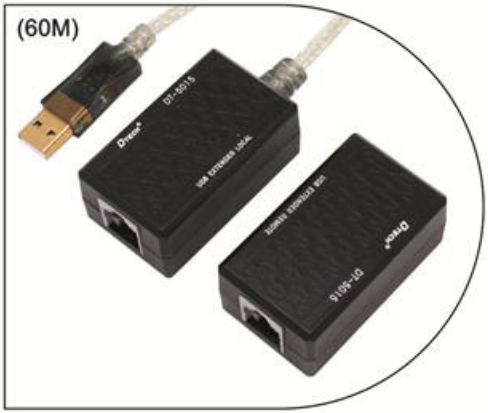

USB 60M Extender

Model:DT-5015

- Compliant with USB1.1.
- Extends a USB device from a USB-enabled computer up to 60m.
- Self-powered for low power needed device such as USB cameras, printers, webcams, keyboard/mouse ect.
- Uses standard Cat5/Cat5E/Cat6 patch cord(not included).



USB 2.0 to Fast Ethernet Controller

Model:DT-5016

- USB2.0 to RJ45 Ethernet Network LAN Cable Adapter
- 10/1000Mbps for Apple Mac Book, Lenovo, ThinkPad, Dell, Sony, Samsung, Acer, Asus etc brand laptop, Tablet PC which without RJ45 interface.
- Interface: USB 2.0 to computer side , RJ45 to network cable.
- Powered by USB port, no external power adapter required.
- Self-adapting 10Mbps or 1000Mbps network adapter.



USB 3.0 to Gigabit Ethernet adapter

Model:DT-6550

- USB3.0 with super speed transfer up to 5Gbps,fully compliant with USB1.1&2.0.
- Gigabit Ethernet provides a fast and stable internet connection.
- No need external power supply.

USB Converter Cable




USB 2.0 to RS422/485 Cable

Model:DT-5019

- Fully compliant with USB1.0.
- Plug&Play.
- Conserves parallel ports for use with scanners, printers, video cameras.
- OS Supports: Windows 98SE, ME, 2000, XP,vista,7,8 or Mac OS 8.6 or Greater.
- Two-way transmission, double shielding, lightning protection and anti-surge.
- 600w anti-surge power.

Model	Length
DT-5119	0.5M
DT-5019	1.2M
DT-5219	2M
DT-5319	3M
DT-5519	5M

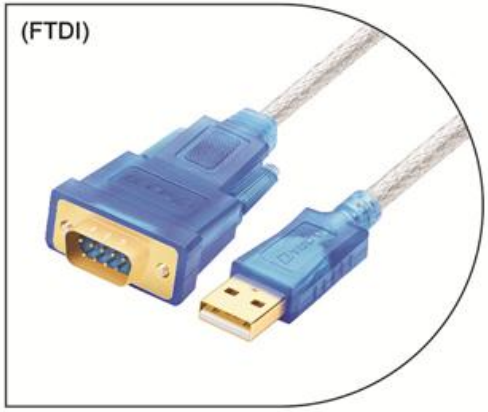


Fully compatible DB9 serial port Cable 1.2M

Model:DT-5011

- With FTDI chipset.
- Converts USB 2.0 port to RS232 9 Pin Serial port.
- Standard USB 2.0 type A Male and RS232 serial 9 pin male interface.USB specification 2.0 compliant.
- Support Win98, 2000, XP, Vista,7,8,10&Mac OS V8.6 or higher.

Model	Length
DT-5011	1.2M
DT-5031	3M
DT-5051	5M


USB Converter Cable

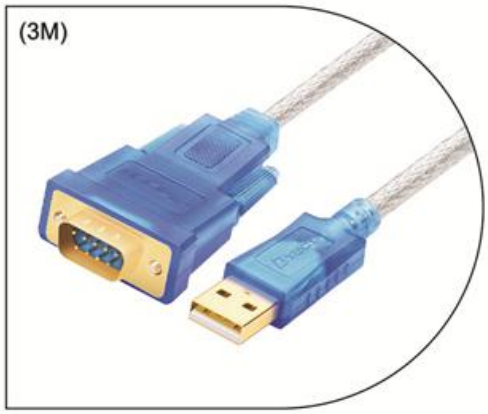

Fully compatible Female DB9 serial port Cable (FTDI)

Model:DT-5031B


- With FTDI chipset.
- Standard USB2.0 type A Male,and female Rs232 serial 9 pin port.
- Support WIN98,2000,XP,Vista,7,8,10&MAC OS V8.6 or higher.

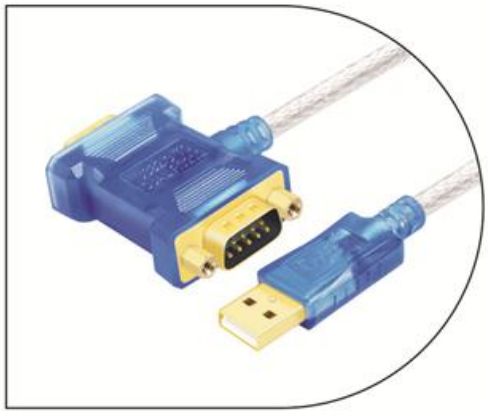

USB 2.0 to dual serial Cable

Model:DT-5024

- Converting a USB Connection to up to 2 DB9 Serial connection.
- Plug& Play Capability.
- Support WIN98/ME/2000/XP/7/8,Linux,Mac os.

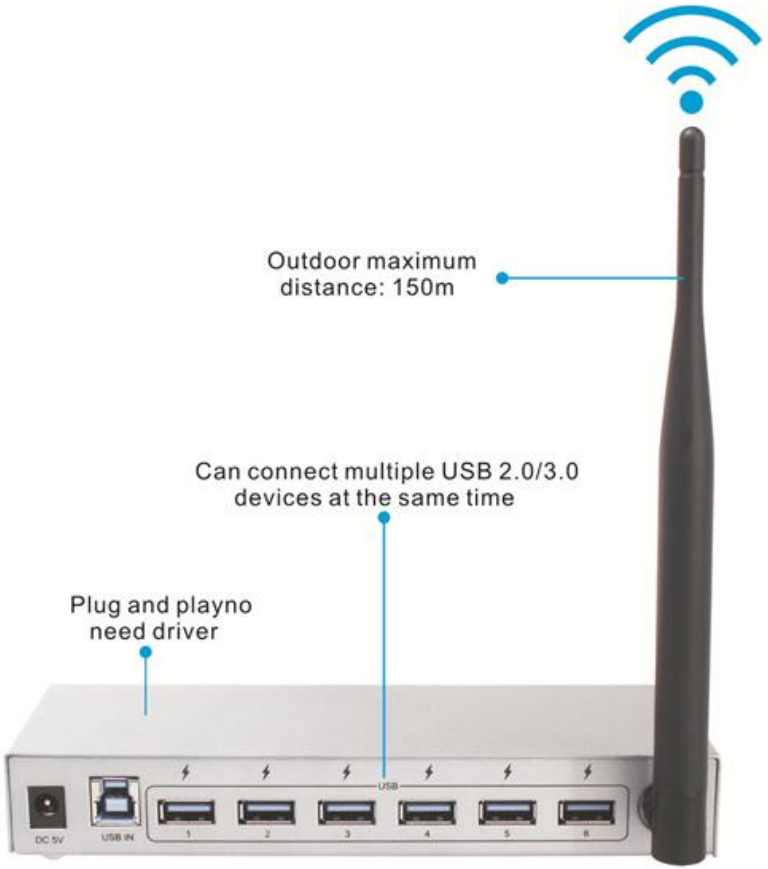
Outdoor maximum
distance: 150m
Can connect multiple USB 2.0/3.0
devices at the same time
Plug and playno
need driver
DC 5V
USB IN
USB
1
2
3
4
5
6

USB HUB

USB HUB



USB 2.0 4-port HUB

Model:DT-3015

- EF1.1S chipset, high performance and low power consumption.
- USB2.0 standards, backward compatible with USB1.1.
- Support BC1.2 charging technology, 2.4A fast charging function.



USB 2.0 to USB 2.0 3-port HUB with 10/100Mbps Ethernet

Model:DT-303

- With dual chip,stable signal and quick transmission speed.
- Extend 3 ports USB 2.0,convenient for your U-flash,keyboard, mouse, Camera, printer, HDD etc.
- Support 10/100Mbps fast network access and IEEE 802.3, 802.3u compatible.



USB 3.0 to USB3.0 3-port HUB with Gigabit Ethernet

Model:DT-304

- GL3523+RTL8153 dual chip, stable signal and quick transmission speed.
- USB3.0 transmission 5Gbps.
- NIC adapts to 10/100/1000Mbps.
- Durable aluminum alloy shell.

USB HUB



USB 3.0 4-port HUB

Model:DT-3308

- Expand one USB port to multiple independent USB ports.
- No need external power,no need driver,support plug&play.
- Built-in power overload short circuit protection device.
- Full compatible with Windows/Linux/Mac systems.

Model	Length
DT-3308	0.25M
DT-3308	1.2M



USB 3.0 Industrial-grade 7-port HUB

Model:DT-3307

- Industrial-grade 7 ports USB 3.0 HUB.
- Connect up your printer, digicam, card reader, mp3 player, U-Flash-Driver, 3G MODEM USB ports products etc.
- Charge up 20pcs Cell phone or others electronic products at the same time,and provide about 600mA charging current for each USB port.
- Fully compliant with USB1.1&USB 2.0.



USB 3.0 Industrial-grade 7-PORT HUB with (WIFI)

Model:DT-3307(WF)

- Be equipped with a power supply with two charging port, accord with BC1.2 agreement.
- Connect up your printer,digicam,card reader,mp3 player, U-Flash-Driver, 3G MODEM etc.
- Fully compliant with USB1.1&USB 2.0.
- Transmission distance, indoor as far as 50 meters; As far as 150 metres outdoor (environmental factors have an effect on distance).

USB HUB



USB 2.0 Industrial-grade 7-port HUB+ BC1.2

Model:DT-3207

- Industrial-grade 7-port USB2.0 HUB conform with BC1.2 agreement.
- Supports 127 kinds of USB 2.0 devices, rate is 480Mbps, backward compatible with 1.1.
- Supports high-speed, full-speed and low-speed devices.
- Plug and Play, no driver, can be connected to seven USB 2.0 devices simultaneously.



USB 2.0 Industrial-grade HUB/WiFi +BC1.2

Model:DT-3207(WF)

- Be equipped with a power supply with two charging port, accord with BC1.2 agreement.
- Connect USB 2.0 high-power devices,such as:high power adapter, mobile hard disk.Etc with power supply.
- In accordance with the IEEE 802.11n,IEEE 802.11g,IEEE 802.11b standard.

USB HUB



USB 3.0 4-Port HUB

Model:DT-3310

- GI3523 chip to support quick charging.
- USB3.0 transmission 5Gbps.
- Exclusive model design.
- Durable aluminum alloy shell.



USB 3.0 4-Port HUB

Model:DT-8009

- Expand one USB3.0 to four USB3.0 port.
- Supports 127 kinds of USB 2.0 devices, rate is 480Mbps, backward compatible with 1.1&2.0.
- Every USB3.0 port have independent switch,mutual non-interference.