


GPSport 260

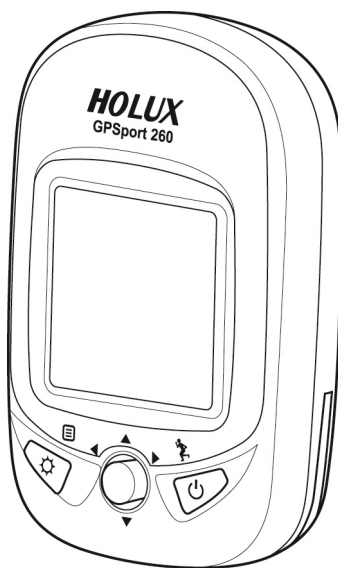

User's Guide

Safety Precautions

- Use the power adapter included with the package, using power adapters other than the one provided will result in malfunction and could prove dangerous.
- Battery replacement should not be performed by consumers, only professionally trained maintenance personnel should do the removal of the cover and the internal components. Note: It may cause explosion if the battery is not properly replaced with the same or equivalent model. Please contact the original professional service personnel to replace the battery.
- Do not use the power adapter in a wet environment. When hands and feet are wet, do not touch the power adapter.
- While using the power adaptor ensure that the area is well ventilated. Do not let paper or other material cover the power adaptor, as this will interfere with cooling. Do not use the power adaptor whilst it is in a bag.
- Do not attempt to repair the device. If this device is damaged or is in a wet environment, replace the device immediately.
- This device is waterproof (meets IPX 7 standard) but not protected against water immersion.

Warranty Information

The GPSport 260 is warranted to be free from defects in material and functions for a period of one year from the date of purchase. If there is a product failure of within this period (under normal conditions), a replacement will be provided at no charge to the customer.

Copyright Information

No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any mean, without the express written permission of Holux Technology, Inc.

Copyright, All Rights Reserved.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

RF Exposure Warning

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

Table of Contents

Introduction.....	1
FEATURES.....	2
PARTS AND FUNCTIONS.....	3
CHARGING THE BATTERY	6
Using the AC Charger	6
INSTALLING BIKE MOUNT.....	7
DOWNLOADING TRACK LOGS.....	9
Installing ezTour Plus	9
Starting ezTour Plus	12
Starting ezTour Planner.....	13
Installing Driver	14
Connecting to a PC.....	16
Introduction of 8 Function Modes	17
MAIN MENU.....	17
SPORT MODE	18
PLOT MODE	25
FOLLOW COURSE MODE	29
MULTI FINDER MODE	35
PEDOMETER MODE.....	37
COMPASS MODE.....	39
HISTORY MODE	40
SETTING MODE	42
SETTING MODE	42
Getting Started.....	45

TURNING ON GPSPORT 260	45
TURNING OFF GPSPORT 260	45
INITIAL SETUP	45
TURNING ON/OFF BACKLIGHT	46
STARTING/STOPPING LOGGING	47
Auto-Start Logging	47
BASIC OPERATION	48
Basic Operation without Setting	48
Speed Meter	48
Quick Menu	50
STATUS ICONS	51
Setting Up GPSport 260	53
QUICK SETUP	53
ALERT	55
To Set Alerts	55
To Set Time Alert	56
To Set Speed Alert	56
To Set Distance Alert	57
To Set Altitude Alert	57
Reset Alert	58
CALIBRATION	59
Altimeter Calibration	59
Compass Calibration	62
LOG	64
GENERAL (SETTING)	67
User Profile	67
Set Backlight	68

Auto Flip Page	68
Memory Mode	69
Auto Power Off.....	70
SYSTEM SETTING	71
Delete all log	71
Time Format.....	71
Time Zone.....	72
Unit	72
Language.....	73
LCD Contrast	73
Odometer.....	74
GPS	75
Reset Device	76
Initial Setup.....	76
About ezTour Plus and ezTour Planner.....	77
FUNCTIONS OF EZTOUR PLUS.....	77
FUNCTIONS OF EZTOUR PLANNER	77
FEATURES OF EZTOUR PLUS	77
Normal Care and Maintenance.....	79
Specifications	81

Introduction

Thank you for purchasing the GPSport 260. The GPSport 260 comes with a sturdy feel and shape and is packed with great features. The GPSport 260 works as a GPS data logger with internal memory, plus, it also serves the purpose of a speed meter that shows immediate sport information including speed, distance, time, and pace while users are exercising. Plus, the built-in 3D compass and barometer sensors make it a perfect gadget for outdoor lovers to find their direction and altitude. One of its simplest functions is to work as a pedometer for everyday exercise measurer and motivator.

The GPSport 260 is bundled with a set of powerful software called *ezTour Plus* and *ezTour Planner*. The former helps users with their health fitness management, while the latter enables users to plan their course prior to their outdoor adventure.


The device plays the role of outdoor best companion and in the meantime reminds users how they can contribute to the environment by calculating and showing the amount of CO₂ emissions reduced and the amount of calories consumed when users are walking/hiking/cycling instead of driving.

Features


- GPS positioning
- Follow course: Allow users to plan routes at home and download routes to the device!
- BMI calculation
- Automatic page flipping
- Auto power off after a specified interval with no signal
- Multi Finder can record up to 20 locations and supports return-to-starting-point
- TripStart automatically records the first GPS fixed location when power on
- Can simulate an analog speedometer and use a large-font display
- 3 sport modes for calorie calculations
- Track Log function can start recording after satellite fix
- Generate QR code for current coordination
- Supports metric, imperial, and nautical measurements
- Supports 12-hour or 24-hour and time zone
- Pedometer

Parts and Functions

Front View

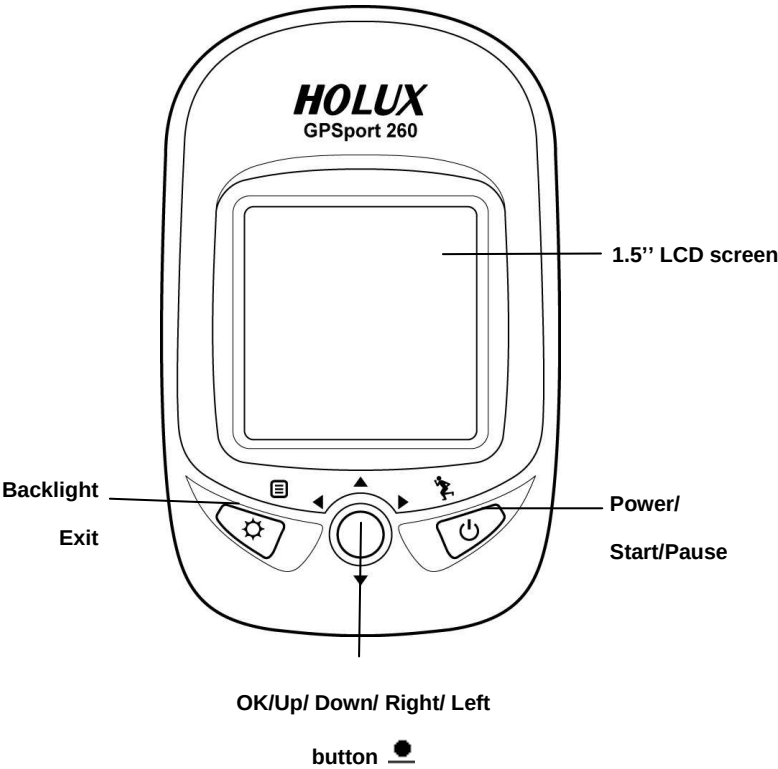

Rear View

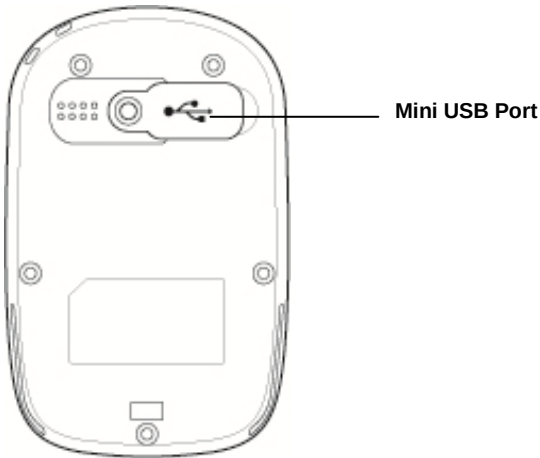

Button


Name	Icon	Function
Power button		Press to pause/resume log when the device is turned on.
		Press for 3 seconds to power on/off the unit.
Exit		Exit to previous level of menu
Backlight		Press for 3 seconds to turn on/off the backlight.

5-Direction OK		Use Left, Up, Right, and Down to select an option. Press the OK button in the middle to confirm selection.
Reset device		Cannot turn off the system with the power button, please reset system.

Charging the Battery

Using the AC Charger

1. Plug the mini USB plug of the AC charger into the mini USB port at the back of the GPSport 260.
2. Plug the AC charger into a wall outlet.

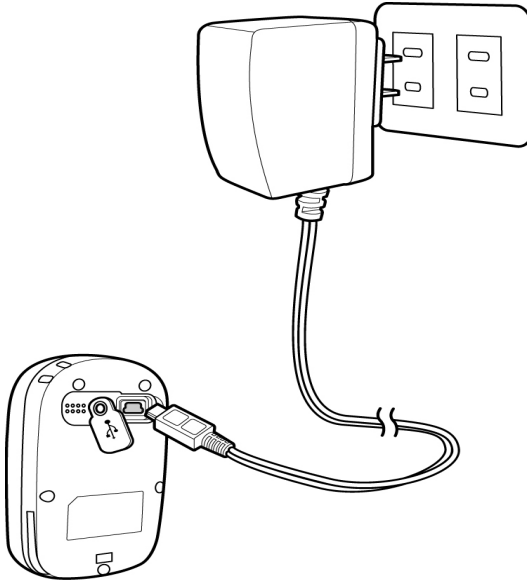


When charging, the Power indicator shows . After charging is completed, the Power indicator shows . If the power indicator shows  while charging, it means the charging is automatically disabled because of circuit protection at high temperature.

Note: Do not charge the device at high temperature otherwise the charging may not be performed or the lithium battery can not be fully charged.


Installing Bike Mount

You can install the bike mount and the GPS on the left or right side of the handlebar or on the stem.


1. Attach the bracket to the bracket holder.

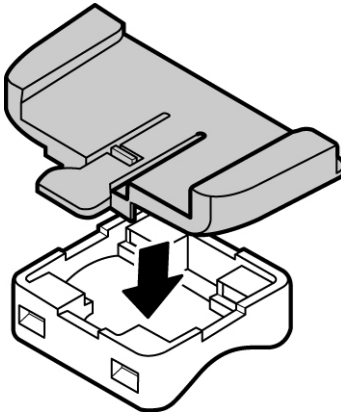

2. Thread the two cable ties through the slots of the bracket holder.

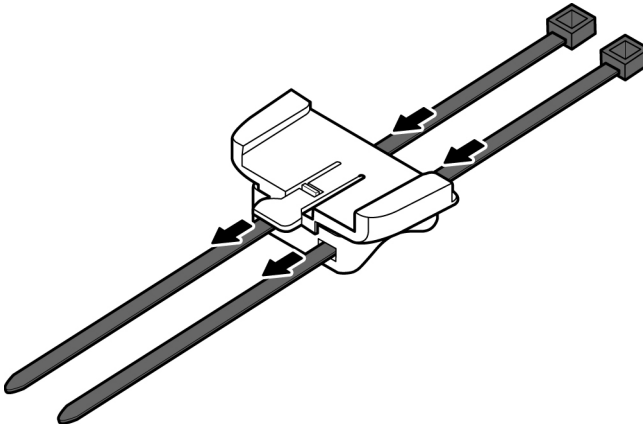


3. Place the rubber pad under the bike mount and attach the bike mount securely to the bike stem using the two cable ties.

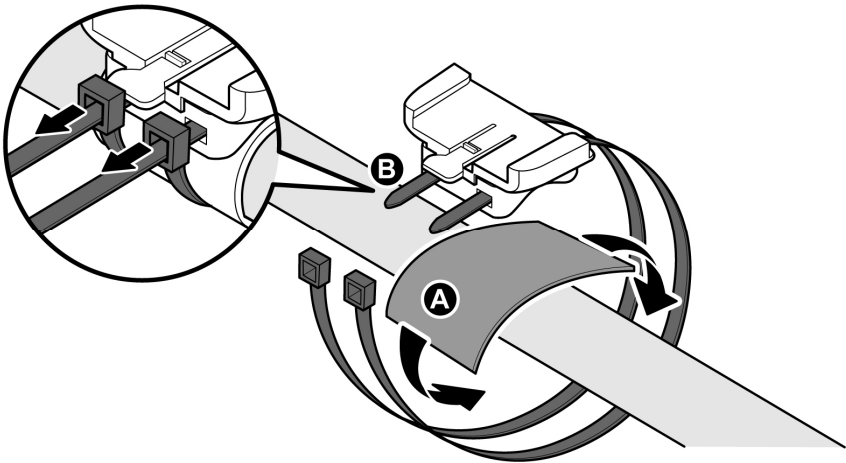

4. Slide in the GPS on top of the bike mount until it snaps into place.

Press here to release the device

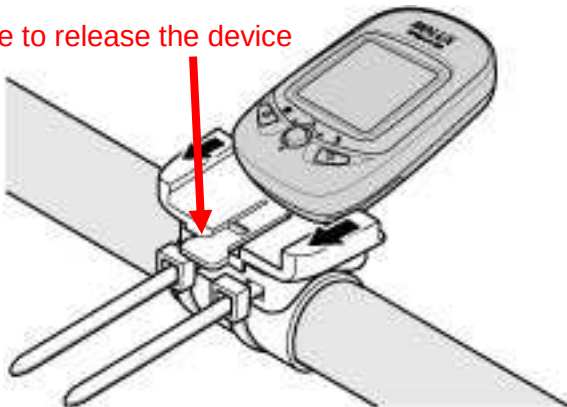

Note: Cable ties are reusable

Downloading Track Logs




To download the recorded track log and view it on your computer, firstly you will need to install the bundled **ezTour Plus**.


Installing ezTour Plus

1. Insert the provided installation CD into the computer's CD drive. The introductory screen appears automatically. If the screen does not appear, open the Autorun.exe file on the CD.



2. Click Next to begin the installation. The License Agreement screen opens.
3. Read the agreement, click I accept the terms of the license agreement, then click Next.
4. Follow the on-screen instruction to proceed. The installation wizard will guide you through the steps.

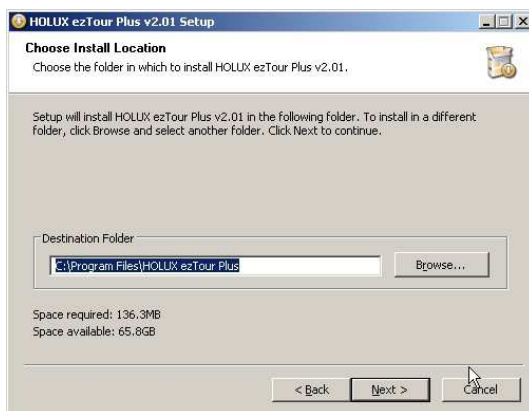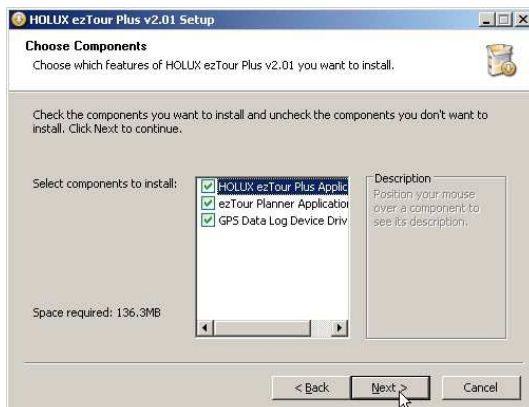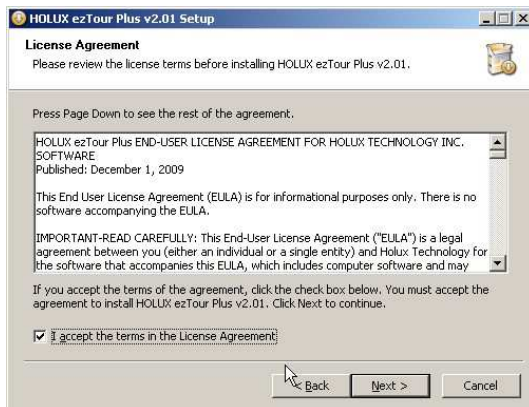

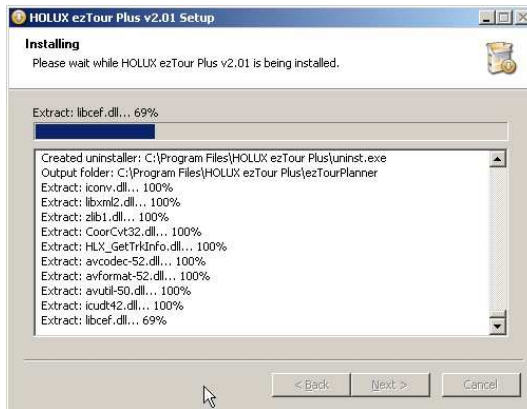

Click Finish to exit the wizard.

Starting ezTour Plus

Once the **ezTour Plus** is well installed in your computer, the **ezTour**

Plus icon  will appear on your desktop as a shortcut. Double-click the icon to start ezTour Plus. The following opening screen appears and you are ready to use the software. For details, please refer to the included **ezTour Plus** user manual.




Starting ezTour Planner

The **ezTour Planner** will be automatically installed when the ezTour

Plus is installed and the program icon  will appear on the tool bar.


Double-click the icon and the software to start planning your courses.

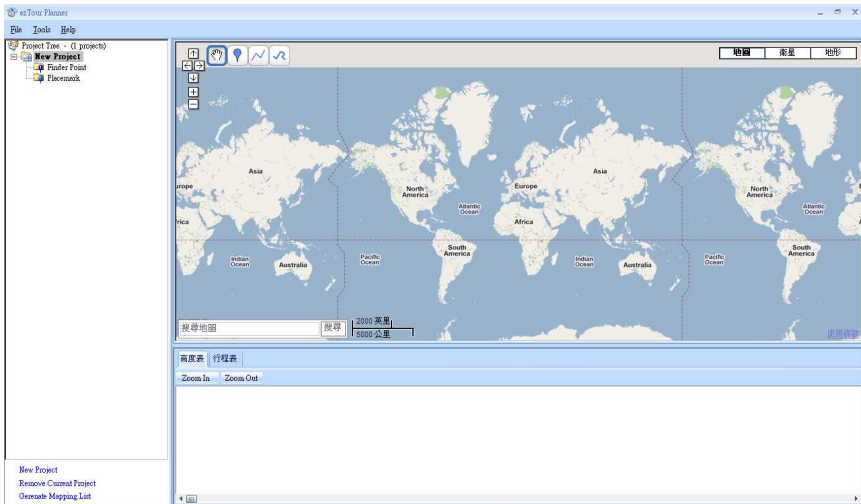

Installing Driver


1. After the ezTour is installed, you can open the "Holux_Driver" folder and install driver.

The path is "C:\Program Files\HOLUX ezTour\DL\Holux_Driver".

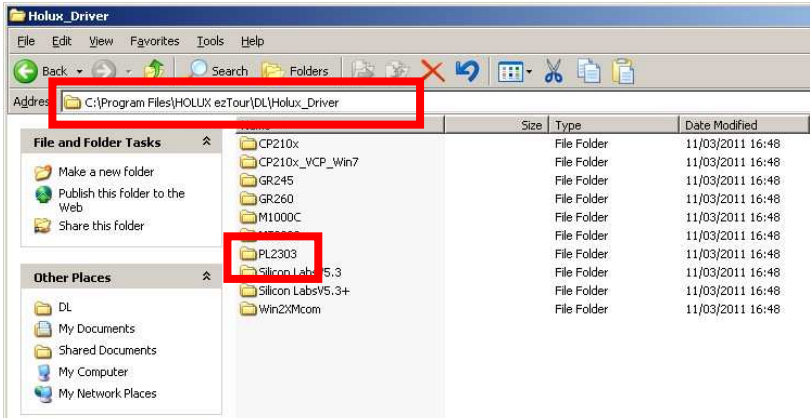

2. Select "PL2303" folder, and click the driver program of the latest date to install.
3. Follow the on-screen instruction to proceed. The installation wizard will guide you through the steps.



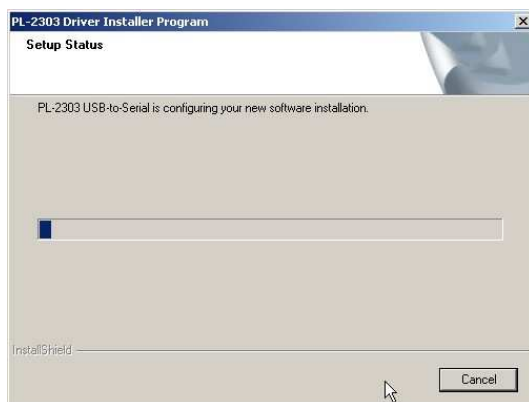


Click Finish to exit the wizard.

Connecting to a PC


After the ezTour Plus is installed, you can now connect your GPSport 260 to your computer to download the recorded track log. Use the included mini USB cable to connect the GPSport 260 with your computer as described below.

1. Connect the mini USB plug (smaller) of the USB cable to the mini USB port at the back of the device.
2. Connect the USB plug (larger) or the USB cable to a USB port on your computer.

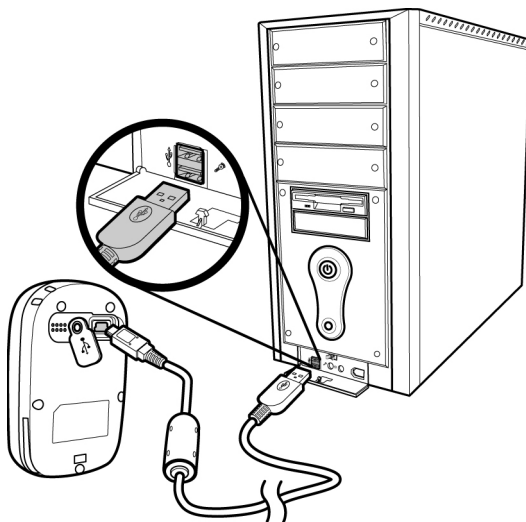

Introduction of 8 Function Modes

Main Menu

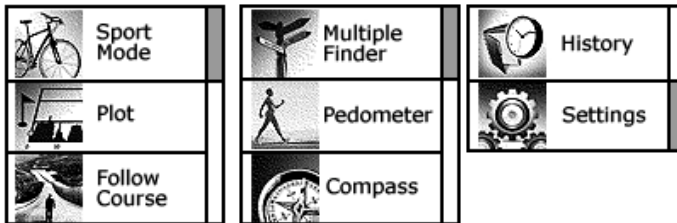

The main menu appears when the device is turned on by pressing the power button. 8 operation modes are displayed in the main menu including Sport, Plot, Follow Course, Multiple Finder, Pedometer, Compass, History and Setting modes. Use the up/down button ▲▼ to scroll up/down and select the mode by pressing the **OK** button●. To escape from mode and return to main menu, press ↶

This chapter describes respective functions of each mode.

Sport Mode




In Sport mode, user can turn on/off the log recording. This mode displays sport information including analog speed meter, speed, time and distance, barometer altitude, calories consumed, and CO2 reduced. Press the 5-way button left ◀ and right ▶ to switch among different sub pages for different sport information.

There are total five sub pages to display sport information in the Sport Mode. Sport information shown on Sub Page 4 and 5 can be determined by users. This 5 way button icon  shown on these two pages means these two pages can be customize. Move the Up/ Down ▼▲ button to select the information to be displayed on Top or Bottom. Enter the Menu to select information. When finished, press the OK button ● to return to the previous level.



Dashboard/ Analog speed meter

Displays the speedometer in analog fashion. Information displayed in this page includes Compass, GPS Signal, Battery Status, Log (status), Grade, Odometer, Current Speed, Trip Distance, and Clock.

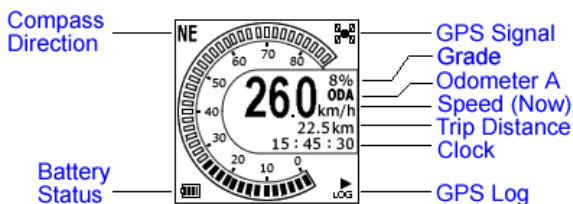

Speed & Distance:

Displays current speed and distance.



Altitude and Trip Time:


Displays barometer altitude and the variation since the log started.

Altitude reading is indicated on Barometer altitude and is displayed as **B**. If users want to have the GPS altitude which will be displayed as **G**, they can set it through user definable pages on Sub Page 4 or 5.



Time and Grade:


Displays current Time and Grade.



Calories:

Displays calories consumed since the log started and total calories consumed today.

This 5 way button icon  shown on this page means the information shown on this page can be determined by users. Move the Up/ Down ▼▲ button to select the information to be displayed on Top or Bottom. Enter the Menu to select information. When finished, press the OK button ● to return to the previous level.





Carbon Saving:

Displays amount of carbon dioxide emissions avoided or number of trees planted by not driving in one journey.

This 5 way button icon  shown on this page means the information shown on this page can be determined by users. Move the Up/ Down ▼▲ button to select the information to be displayed on Top or Bottom. Enter the Menu to select information. When finished, press the OK button ● to return to the previous level.

The sport information can be selected by users and displayed on Sub Page 4 and 5 are listed as below.

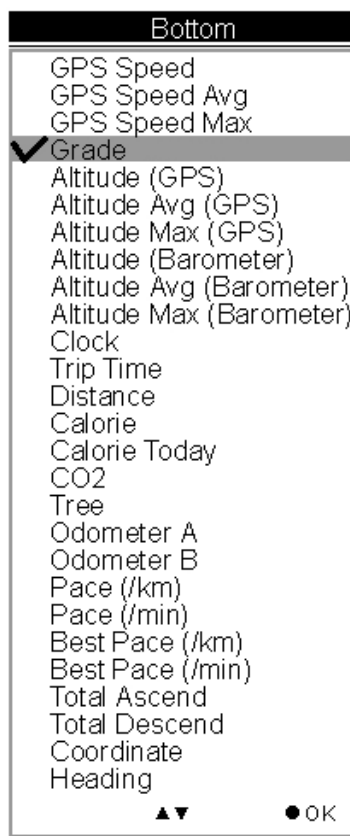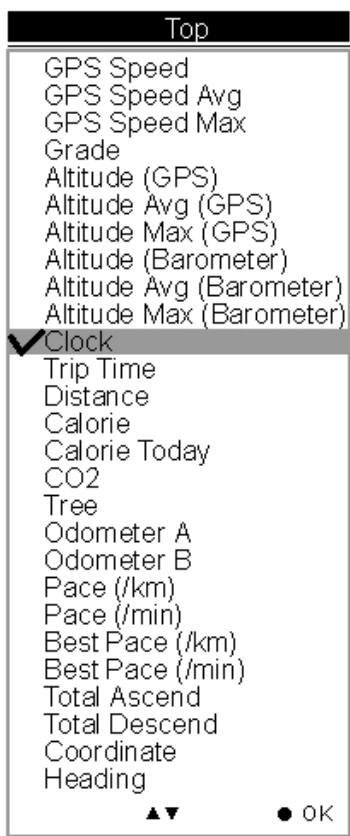


The above selection, for example, will result in the display on Sub Page 4 as shown.




User Defined Screen

Listed below are user defined screens of all combination.




GPS Speed
GPS Speed Avg



GPS Speed Max
Grade




Altitude (GPS)
Altitude (Barometer)



Altitude Avg (GPS)
Altitude Max (GPS)



Altitude Avg (Baro)
Altitude Max (Baro)




Trip Time
Trip Distance




Clock



Calorie
Calorie Today



CO2 (kg)
Tree (pcs)




Odometer A
Odometer B




Pace (min/km)
Pace (km/min)



Best Pace (min/km)
Best Pace (km/min)




Total Ascend
Total Descend



Coordinate
Heading


Plot Mode



Plot mode shows track log in graph and in real time display without interruption.


The real time transectional plot shows four units of sport information including:

- Altitude + Time
- Altitude + Distance
- Speed + Time
- Speed + Distance



Plot

Displays the graph for altitude and time. Use the down ▼ and up ▲ buttons to zoom in and zoom out. Use the right button to move the x- and y- along the graph.



View Mode

- Real-time track drawing
- Push the OK button to enter Pan/Zoom mode



Compass



POI


- Real time track drawing; push to enter Pan/Zoom mode



Back to Menu



Show POI. Press again to disable the function. POI name will be displayed in the language edited in ezTour Planner.



Pan Mode

N North




track to left/right & top/bottom



Back to View Mode



Press to show POI. Press again to disable the function. POI name will be displayed in the language edited in ezTour Planner.




Zoom Mode

▲
▼ Zoom out /Zoom in

↶ Back to View Mode





Show POI. Press again to disable the function. POI name will be displayed in the language edited in ezTour Planner.





Plot Mode

Display Altitude/Speed plot



The following x- and y-axis combinations are available:


- Altitude + Time
- Altitude + Distance
- Speed + Time
- Speed + Distance




Orientation direction can be based on

1. GPS
2. Always north
3. According to Compass

The orientation direction appears on Track View (in Plot Mode) to help users with more track information besides Altitude, Time, Speed, and Distance.



Select to toggle between Hide Track and Show Track.




Information varies as it displays real-time sport information.

Follow Course Mode



Enter this mode to follow a well- recorded track or from history logs.



To follow course, tracks can be acquired from one of the following methods:

1. Plan your routes with ezTour Planner and then send it from the PC to GPSport 260. Please refer to the ezTour Planner user manual for details.
2. Get course directly from History log recorded in this device.


Follow course from **listed** tracks



List

Displays the tracks currently stored on the GPSport 260.


The listed tracks were pre-planned and exported from ezTour Planner



Track details includes:

Distance, time, maximum speed, average speed, calories, carbon reduction, trees planted, and the number of check points in the track.

Only Distance, Time and Checkpoint will be displayed in the track detail when the list is exported from ezTour Planner.



Check Points

Preview all checkpoints and the details of check points in one track.

When a check point is selected, you will be prompted to confirm if the selected check point the starting point to follow. Press the OK button ● to confirm.



Follow course from **history** logs



History List


Displays the tracks logs currently stored on the GPSport 260.



Track details:


All history logs are listed in time order followed by track distance.

Move the up and down cursor to select the log.
Press the OK button to review the log in details.



Distance, time, maximum speed, average speed, calories, altitude, carbon reduction, trees planted, and the number of check points in the track.





Check Points

Preview all checkpoints and the details of check points in one track.


When a check point is selected, you will be prompted to confirm if the selected check point the starting point to follow. Press the OK button ● to confirm.

View Track Course in Speed Meter Mode



View Track Course

Loaded track can be displayed in four modes, i.e. Speed Meter, Plot Mode, Track View and Orientation.



User left right button to switch between pages.

Shows distance & ascend to next check point and distance to the destination.



To next check point	←	To Water
Target Direction	←	↗ 253.5 km
Total Ascend	←	↗ 32.5 m
Time based on current speed	←	ETA 00:45

To destination	←	To Destination
Target Direction	←	↗ 324.5 km
Total Ascend	←	↗ 32.5 m
Time based on current speed	←	ETA 02:05

View Track Course in Plot Mode



Show track on Plot Mode.




View Track Course in Track View





Shows Check Points on track;


Zoom in / out for the loaded track.



Press the ● button to enter/toggle between the Zoom & Pan mode




Multi Finder Mode




The Multiple Finder Mode shows the direction to the start of the track and leads you back to the starting point; alternatively, enter the coordinates for the destination to be guided by direction and distance.



- TripStart auto memorized your first GPS fixing location. This cannot be edited or changed by users.



- Stores up to 20 user defined Finder points
- Upload Finder points directly from ezTour planner with their own language
- Allow users to edit coordinate on device
- Allow users to mark a new Finder point on device
- Allow users to switch coordinate between WSG84 and Geocache format

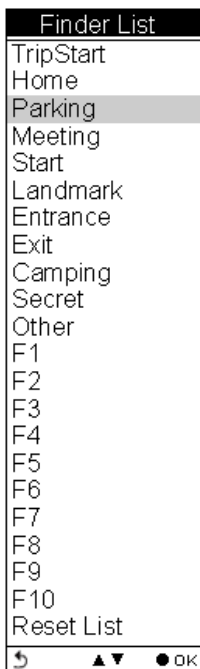

List Points


Users may store up to 20 records.

Select Reset List to clear all recorded Finder.



Set Points

Save current coordinates to a Finder point on the List.



Show

Displays the coordinates of current location and the destination.

Pedometer Mode



Pedometer mode enables users to count and record the number of steps taken, and the calories burned.





Press the Power button  to Start/Pause Pedometer.

Press the OK button  to enter the Option Menu.



The icon  appears to indicate the pedometer is starting.

Main screen: The device will start counting the walking steps, time, distance, and calories burned.



Press the OK button ● to Reset Counter or to set the Stride Length.


Please note:

1. Unless Reset Counter is selected and confirmed, Pedometer will not be reset and number of steps will be stored when the device is turned off.
2. Log recording continues when Pedometer is working.


Enter this mode, input your stride length and press OK.

While working as a pedometer, the GPSport 260 needs no GPS signal to calculate distance. Distance is calculated on the basis of steps timing stride length.

Compass Mode



- Works as a regular magnetic compass




- Shows direction mark with degree
- Shows current coordinates



- Push CAL to calibrate compass

History Mode



History shows track details including speed, time, distance, altitude, check points, calories consumed, and CO2 reduced.

History	
List	
Favorite	
Statistics	
Total	246
Favorite	2
⏮ ▲ ▼ ● OK	

Displays total number of tracks. Tracks can also be set as Favorite.

List	
10-11	32.2 km
11-24	44.1 km
11-26	22.4 km
12-04	89.7 km
01-08	188.44 km
01-13	246.8 km
▶ NAME ● INFO	

Track List displays all history track logs with track time and distance listed by order of time.

11-26 16:30	
DST	62.8 km
TIM	01:16:32
SPD MAX	39.4 kmh
SPD A/G	21.8 kmh
CAL	485
Check Points	8
● FAV ◀ ▶ PLOT ● REV ▲ ▼ CPT	

11-26 16:30	
CO2 ↓	1.25kg
Tree	1.5

List
Set as Favorite?
⏮ ● OK

Push the OK button to save the track to your favorite list.

Favorite: Collect your favorite tracks in one place.

History	
List	
Favorite	
Statistics	
Total	246
Favorite	2
    OK	

Statistics: shows activity statistic for all tracks or favorites.

Statistics	
List	
Favorite	
    OK	



List	1 Day
DST	55.4 km
TIM	02:15:32
SPD MAX	38.4 kmh
CAL	975
CO2 	65
Tree	1.2
 	

Track statistics. Use the left and right buttons to switch between different intervals (1, 2, 3, 4, 5, 6, 7, 10, 12 days, 2 weeks, 1 month, and all.)




Setting Mode



Setting Menu





Quick Setup





Quick setup allows you to select **sport** type, set user **weight** and select **Odometer**.

Alert





The Alert function can be set for **time**, **speed**, **distance** and **altitude**.

Calibration





Calibration is needed at the start of each activity's log.

Log





The GPSport 260 is set to automatically start logging user's track once it is turned on. Users can also set the log interval by pre-determined time or distance.

General



The General Setting includes User Profile, Backlight, Auto Flip Page, Memory Mode and Auto Power.

System



System includes Delete All Log, Set Time Format, Time Zone, Unit, Language, LCD contrast, Odometer, GPS, and Reset Device (Factory Reset).


Getting Started

Turning On GPSport 260

Press the **Power** button until the startup screen appears on the LCD.






Turning Off GPSport 260

Press the **Power** button for 3 seconds and you will be prompted a message to confirm the message. Press the OK button again.



Initial Setup

Please perform the initial setup for the **very first time use** of GPSport 260. If the GPSport 260 is reset, the Initial Setup will automatically start when users turn on the device.




Turning On/Off Backlight

Press the ☀ button for 3 seconds to turn on/off backlight.

Backlight can be set to Always on, or you can set it to be automatically turned off after 10, 30, 60, or 120 seconds as displayed below.

Go to **Main Menu → Setting → General → Set Backlight**

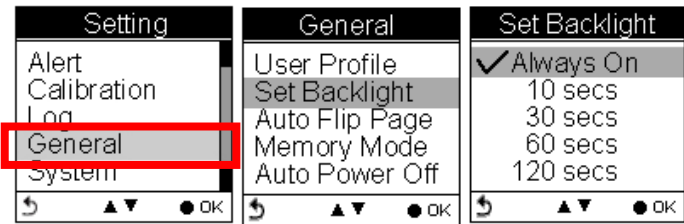

Starting/Stopping Logging


Auto-Start Logging

The GPSport 260 is set to automatically log your track once it is turned on.

To pause logging during activity, just press the Power  button and the icon “” will be replaced by pause icon “” as shown below.

Users are able to use the Quick Menu function to start/pause the log.

( + )

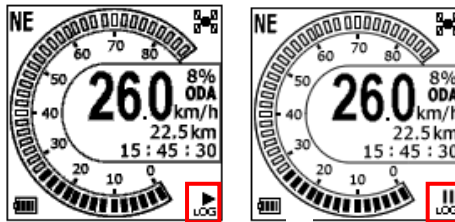


For more details on data log recording, please refer to the later section titled “Log”.

Basic Operation


Basic Operation without Setting

The GPSport 260 is designed to automatically log once it is on and GPS signal is received. Select **Sport Mode** from the main menu and the default first page Speed Meter appears. You are ready to use the basic function of this device.


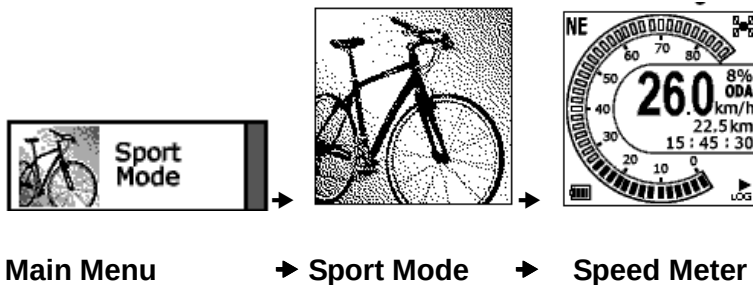


Speed Meter

See below for the description of Sport Information on the speed meter.

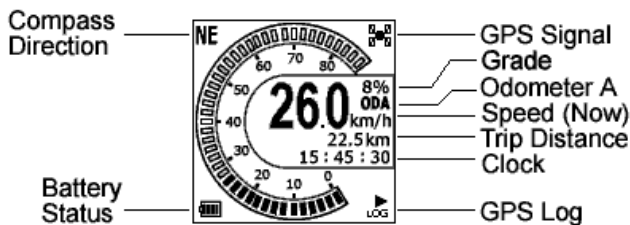

Press the left ◀ or right ▶ to switch among pages with different sport information as shown in the following sub pages. The top and bottom sport data items on Sub Page 1, 2 and 3 are fixed. As for Sub Page 4 and 5, both top and bottom data items can be changed and selected by customers. Press ▲ to enter the menu of sport information to select for top row and ▼ for bottom row.



Quick Menu

Press  and  concurrently, the quick menu appears for fast setup including: enter Main Menu, Save POI, Pause Log, Save & Clear (log), and QR Code and Lock Keys.



Save POI

Save coordinates as POI (waypoint)

Pause Log

Pause track logging.

Save & Clear

Save the track and start another new log.

QR Code

Display current location in a QR code for mobile devices.



Lock Keys

Lock the buttons to avoid accidentally touch. Press

 +  to unlock.



Status Icons

The status icons indicates Sport mode, Compass icon, POI, Backlight, Satellite Status, Memory Mode and Battery. 

Sport mode icons:



Bicycle mode



Running mode



Walking mode



Vehicle mode

Track Log icons:



Track currently being logged



Track currently not being logged

Compass icons:



The black arrow always points north



The compass needs calibrating

Backlight icon:



Backlight is on

Satellite mode icons:



Satellite fix acquired



Device currently attempted to acquire satellite fix

Memory mode icons:



Overwrite: Memory now in Overwrite mode



Full Stop: Show % of remaining memory

Battery status icons:



Battery is being charged



Battery is fully charged




Low battery warning

Note: When battery is extremely low, the device will be turned off automatically.

Setting Up GPSport 260



Quick Setup



User-friendly Quick setup function allows you to quickly setup most common settings. Press the Menu button to enter Main Menu and choose Quick Setup to begin.



Q1. Sport Mode appears.


Use the Up/Down button to move to the desired sport mode.

Press the OK button to confirm and save.



Q2. Weight setup appears

1. Press the Left/Right ◀▶ button to move among digits.
2. Press the Up/Down ▲▼ button to adjust the value.
3. Press the OK button ● when finish.



The Odometer page appears.

Odometer A/B appears for users to choose between different trips. This is useful especially when users want to calculate mileages for different trips in different sport modes.

1. Press the Up/Down ▲▼ button to select odometer.
2. Press the OK button ● when finish.
3. Return to the main menu. Press the Power Key  to start.

Alert


The Alert function can be set for **time**, **speed**, **distance** and **altitude**.

- **Time Alert**
 - appears only when the pre-determined time is reached.
- **Speed Alert**
 - appears only when the pre-determined speed is reached.
- **Distance Alert**
 - appears only when the pre-determined distance is reached.
- **Altitude Alert**
 - appears only when the pre-determined altitude is reached.

You can press any key to disable the alert message.


To Set Alerts

1. Press the Menu button to enter Main Menu.
2. Go to Setting → Alert.
3. Select Time, Speed, Distance or Altitude to open submenu.

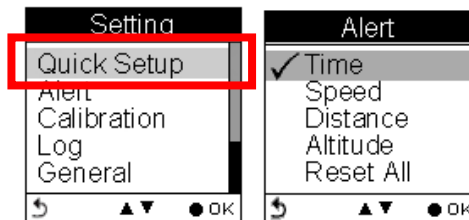

To Set Time Alert

- i. Press the Left/Right ◀ ▶ button to move to left/right.
- ii. Press the Up/Down ▲ ▼ button to adjust the value. Press the OK ● button to confirm.
- iii. Press the Up/Down ▲ (Y) / ▼ (N) button to check ☐ Enable or leave it blank.
- iv. Press the OK ● button to confirm and return to the Alert Menu.

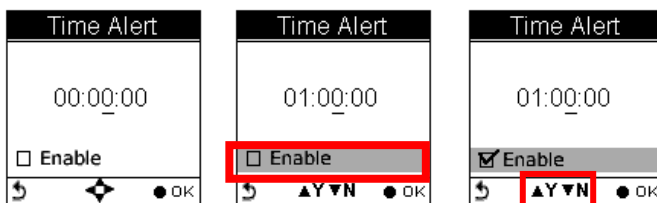

Note: Time must be set within the range of 00:00:01 to 23:59:59.

To Set Speed Alert

- i. Press the Left/Right ◀ ▶ button to move to left/right.
- ii. Press the Up/Down ▲ ▼ button to adjust the value. Press the OK ● button to confirm.
- iii. Press the Up/Down ▲ (Y) / ▼ (N) button to check ☐ Enable or leave it blank.
- iv. Press the OK ● button to confirm and return to the Alert Menu.



Note: Speed must be set within the range of 1 to 500 (km/h).

To Set Distance Alert

- i. Press the Left/Right ◀ ▶ button to move to left/right.
- ii. Press the Up/Down ▲ ▼ button to adjust the value. Press the OK ● button to confirm.
- iii. Press the Up/Down ▲ (Y) / ▼ (N) button to check ☐ Enable or leave it blank.
- iv. Press the OK ● button to confirm and return to the Alert Menu.



Note: Distance must be set within the range of 1 to 500 (km).

To Set Altitude Alert

- i. Press the Left/Right ◀ ▶ button to move to left/right.
- ii. Press the Up/Down ▲ ▼ button to adjust the value. Press the OK ● button to confirm.

- iii. Press the Up/Down ▲ (Y) / ▼ (N) button to check ☐ Enable or leave it blank.
- iv. Press the OK ● button to confirm and return to the Alert Menu.




Note: Altitude must be set within the range of 1 to 9999 (m).

Reset Alert

You may also reset alert by selecting Reset Alert from the Alert submenu:

1. Select Reset Alert.
2. Press the OK button to confirm.

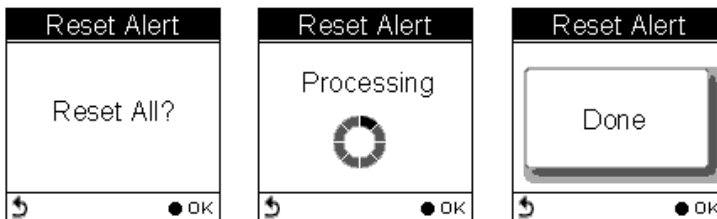

Calibration

GPSport 260 comes with built-in 3D electronic compass and barometer sensors. Calibration for barometer is necessary at the start of each activity's recording.

The 3D compass calibration is required to separate the earth's magnetic field from stray magnetic fields emitted by something metallic/electronic like a car for which may affect the operation of the compass. Without calibration, the 3D compass may have inaccurate readings.

As for barometer calibration, the GPSport 260 provides two methods for users to calibrate, i.e. **Auto calibration** and **Manual calibration**.

Manual calibration is recommended when the user knows his true elevation there, for Manual calibration uses the calibrated altitude as truth and assumes all changes in the pressure sensor are associated with the barometric pressure, Manual calibration therefore will be more accurate

Altimeter Calibration

A barometer is an instrument for determining the pressure generated by the weight of the atmosphere. Users can use GPSport 260 to determine their immediate altitude and altitude gained/lost.

Barometer calibration is set to be automatically performed by default. However, users can set the device to be manually calibrated.

Note: If the device is set to Auto Calibration, the altitude will be gained from the following algorithm.


1. the first 5 log points in 5 seconds after GPS fixed are acquired.

2. the highest and lowest ones of the 5 log points are left out. There are 3 values remained.
3. Average the 3 values.

The auto calibration is performed every time when the device is turned on.

Auto Calibration:


- **Main Menu → Setting → Calibration → Altimeter → Auto**

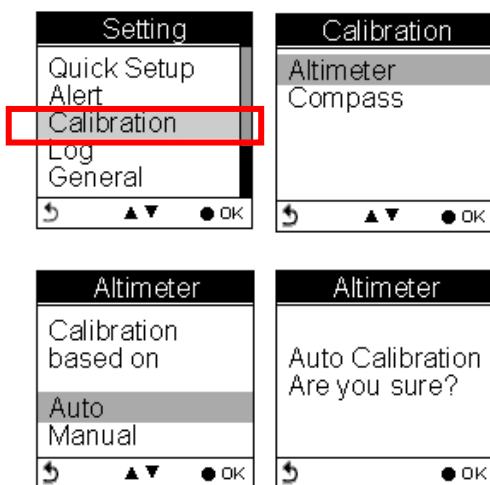

Manual Calibration:

- **Main Menu → Setting → Calibration → Altimeter → Manual**
- Enter the current height by pressing the Up/Down ▲▼ button to adjust the value. Press the OK button ● to confirm and exit.

Note: Altitude must be set within the range of -999 to +30,000 (m).

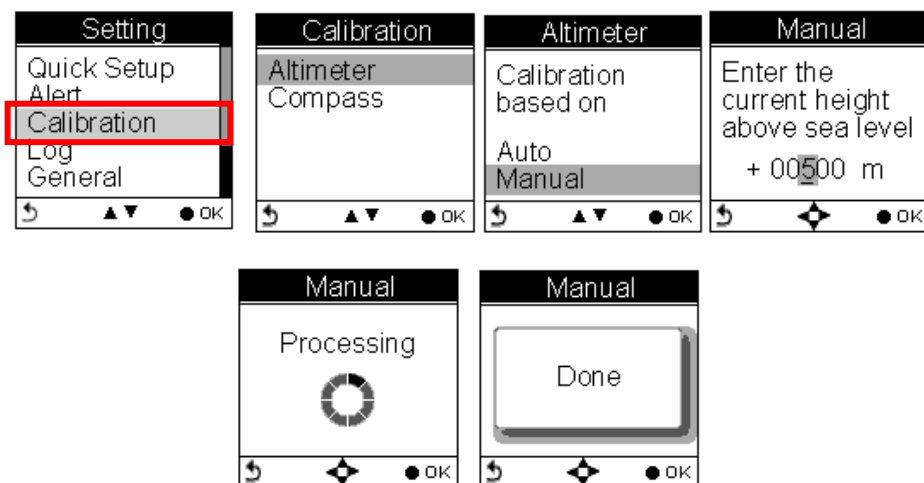


Compass Calibration

■ Main Menu→ Setting → Calibration → Compass

Press the OK button ● to calibrate the compass.


Step 1.

Hold the compass level with the horizon. Make sure that you are not near any metallic or magnetic objects. Press the OK button.




Step 2.

Rotate the compass twice slowly (two complete rotations), make sure that the compass remains level to the horizon.

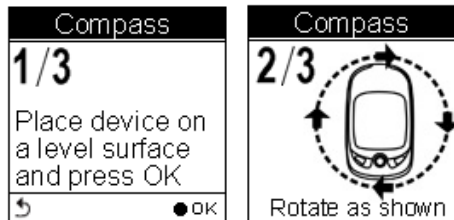


Step 3.

Press the OK button. Once calibration is finished, the following screen appears follows a beep sound.

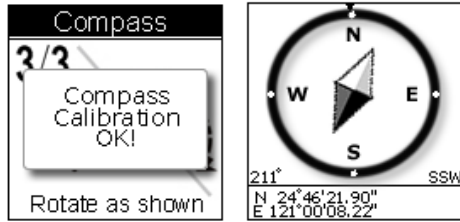

Note: Users should always calibrate the compass at the start of their outdoor activities for more accurate log information.

Log




Interval

The GPSport 260 is set to automatically log your track once it is turned on. The factory setting of automatic logging is set to log at interval of time/distance ≥ 10 m/5 sec.


The GPSport 260 checks the distance every 5 seconds.

See below illustration for an example. If the distance is less than 10 meters in the first 5 seconds, the GPSport 260 is not logging.

The GPSport 260 checked again in another 5 seconds. The total distance then is 16 meters long, so it logs and one waypoint is recorded. The device resets the counter and measures the distance and time again.

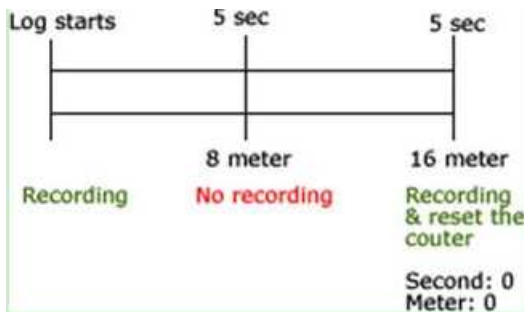


The log Interval Auto is useful especially for users who do not want to repeatedly record one waypoint during a trip. Most cases, recording waypoints at the same place only because users were staying for a period of time is not necessary.

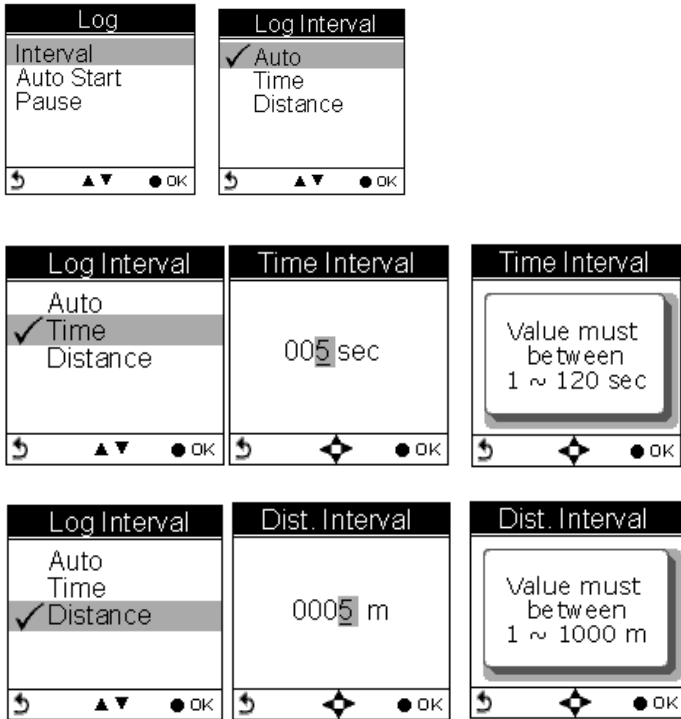

*Note: Time interval must be set within the range of 1 to 120 seconds;
Distance interval must be set within the range of 1 to 1000 (m).*

Auto-Start (Logging)


Auto-Start means the GPSport 260 will automatically starts to log once the satellite signal is well received. User can enable/disable the auto logging by entering **Setting →Log→ Auto Start →Yes/No**

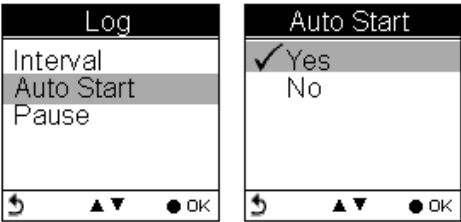


Pause (Logging)

Users can set the log to stop/pause recording when the speed is below a determined number from 1km to 5 km.


Press the up and down button to check the ☐ Enable box.



General (Setting)

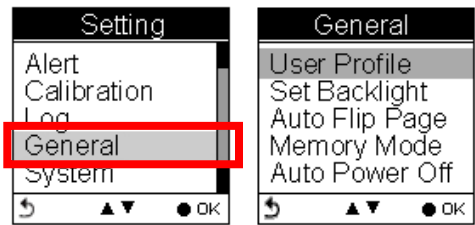

User Profile

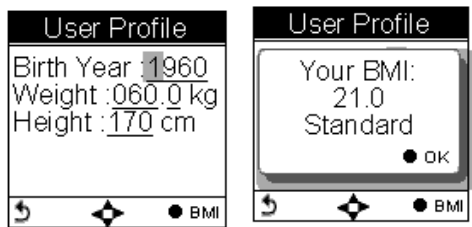


Users profile includes User's age (Birth year), Weight and Height. Once the above information is entered, user's BMI (Body Mass Index) value is determined. Refer to the following table for BMI categories.

Body mass index by category	
Category	BMI
Underweight	Below 18.5
Normal	18.5 - 24.9
Overweight	25.0 - 29.9
Obesity	30.0 or greater


Set Backlight

Backlight can be set to Always on if needed. To save power, backlight can be set to automatically off after it has been activated for 10, 30, 60 or 120 seconds.

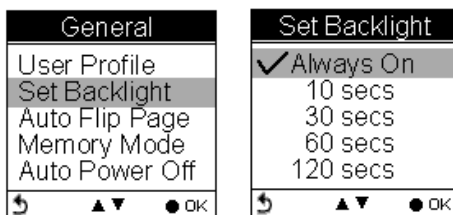

Auto Flip Page

Users can enable the Auto Flip Page to rotate all sport information pages regularly by 5, 10, 30 or 60 seconds. Or they can choose to manually flip the Sport Page.

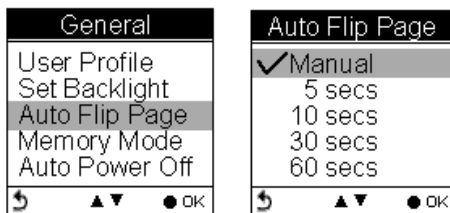


Memory Mode

As a data logger, the GPSport 260 is designed to automatically collect information upon activation, and can be left unattended for the duration of the monitoring period, the internal memory will be used up by recorded information.

Overwrite

Users can then determine if new data logs received should overwrite old data logs data logger by selecting **Overwrite**. Press the Up/Down ▲▼ button to select.

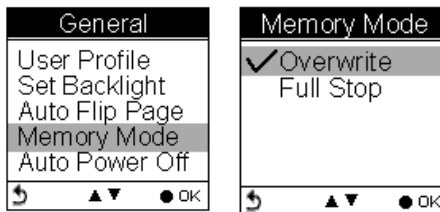

Full Stop


If users want the logger automatically stop recording when the internal memory is used up and no room for recording new data logs, select “**Full Stop**”. Press the Up/Down ▲▼ button to select.

Auto Power Off


The GPSport 260 can be set to be automatically powered off when there's no GPS signal being detected for 15 minutes, 30 minutes, 1 hour, or 2 hours.

Users can ignore the function and set to No which will keep the GPSport powered on even when there's no GPS signal detected.

To enable the Auto Power Off, please go to **General** → **Auto Power Off**

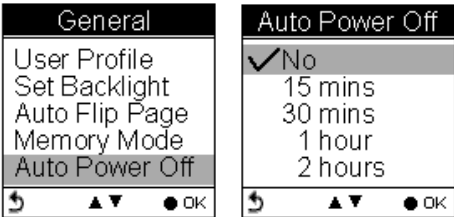


System Setting



Delete all log


Select “Delete all log” will empty the internal memory and all recorded log data will be removed.

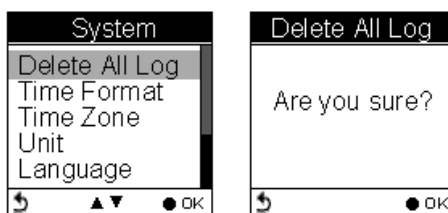

Time Format

System → Time Format


Select format “24 hours” and “12 hours”.

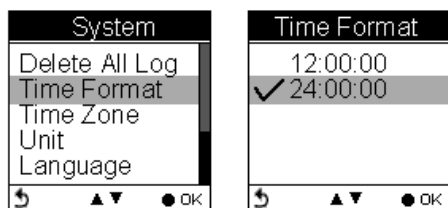

Time Zone

System → Time Zone

Press the up and down button to select.

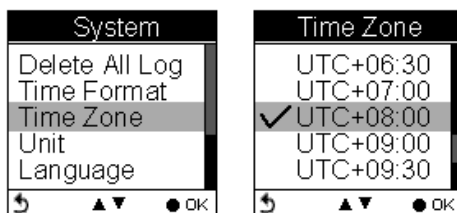


Unit

Unit Conversion converts units of Speed/Distance, Weight and Temperature.

Speed/ Distance

System → Unit → Speed/Distance

Select “Distance/Speed” to choose metric as “km/m/kmh”, imperial as “mi/ft/mph” or nautical as “kt/nm”.

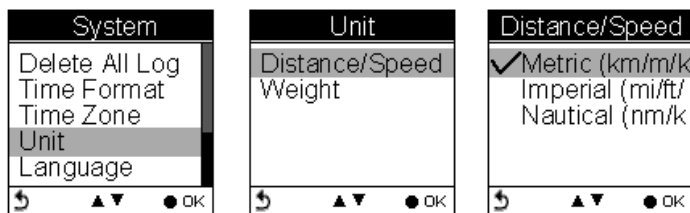


Weight

System → Unit → Weight

Select “weight” to choose metric as “Kilogram/kg”, or imperial as “Pound/lb”.



Language

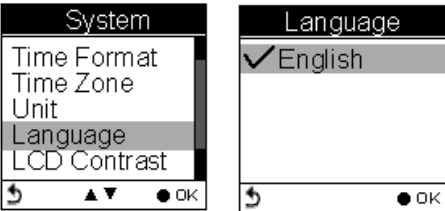

LCD Contrast

LCD contrast can be adjusted in the LCD Contrast. Press the Up/Down ▲▼ button to select.




Odometer

You can save trip information in Odometer A or Odometer B. The default is Odometer A.


The value of both odometers can be reset or modified.

- Press the left and right button to move among the number. Press up and down button to increase/decrease the value. When finished, press OK button ● to continue.
- Press the up and down button to tick the ☐ Enable box.

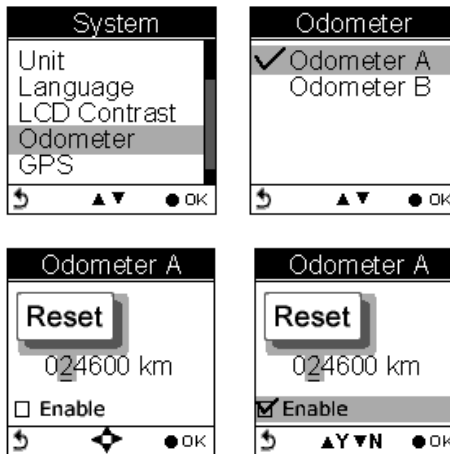


GPS

Enter GPS to view the signal strength or you can activate to Cold Start.



Signal


Setting → GPS → Signal

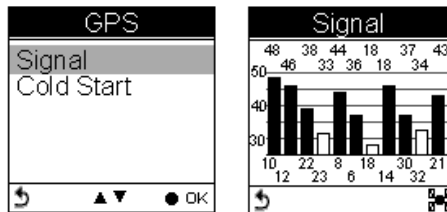

Cold Start

Setting → GPS → Cold Start


Users are recommended to perform Cold Start when they travel for a long distance within a short period of time, say flying from Asia to Europe, for the GPS receiver may have problem to receive information about the current time, the orbits of the satellites or its own current position with previous GPS acquired. The searching time will be long for it proceeds to listen for satellites at random until it has acquired one or more. Cold Start will initialize the positioning of GPS and etc.

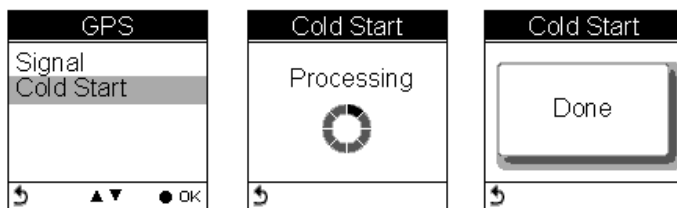

Reset Device


Press Reset Device to restore all settings to factory setting. Please note that all existing values and settings will be cleared except for Track logs in history, history name, finder point & name, odometer data, & POI data.

Once the device is reset to factory setting, users will be prompted with the initial setup screen when the device is turned on.

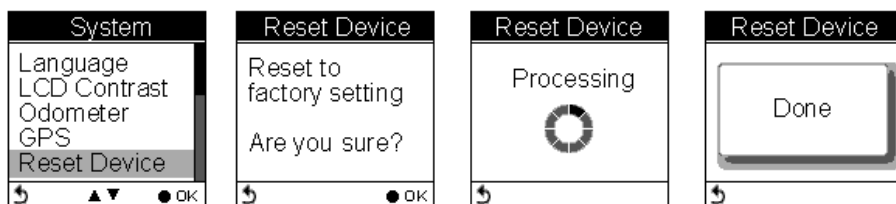

Initial Setup

The initial setup screen prompts when users turn on the device for the first time.

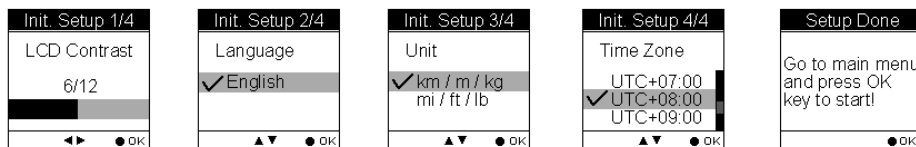

About ezTour Plus and ezTour Planner

Functions of ezTour Plus

- Posses the original ezTour function and more!
- Statistic view shows you accumulated activity statistics based on the date rage the users selected!

Functions of ezTour Planner

- Plan route at home with an easy to use tool
- Edit the route directly on the Google map!
- Able to plan the route between two points or follow the road
- User define Placemark to plan the rest point at home
- Automatically show earth elevation as soon as the route is completed!
- Able to synchronize the route to GPSport 260
- Import/Export .gpx .kml files for other usages
- Access multiple projects in the same project window.

Features of ezTour Plus

- Display statistic data in month, week, or day view. Support both chart view and table view.
- Analyze sport data in terms of time, distance, speed, and elevation.

- Allow users keep notes of every activity.
- Replay the activity on map and detailed information of every point.
- Analyze detailed information for user defined segment of activity.
(marker1 marker2 support.)
- Export statistic data to Excel report.
- Plan routes before trip or activity.
- Automatically find route by start and end points setting.
- User defined point of interest.
- Support check-points and itinerary for trip/activity.
- Share routes with friends by exporting/importing kml, gpx files.
- Support various exercises or sports.

Normal Care and Maintenance

To ensure the unit's normal operation and extended life span, please note the following while using and storing:

Do not drop the unit

If violently impacted or shocked, serious damage may be caused.

Avoid sudden temperature changes

Condensation may occur when entering a warm room on a cold day. To prevent condensation from damaging the unit, please place into an airtight plastic bag before sudden temperature changes.

Keep away from strong magnetic fields

When using or storing, please keep away from strong electromagnetic/radioactive or magnetic field equipment.

Operating temperature

The products operating temperature is between 0°C ~ 40°C; please do not operate under extreme temperatures.

Avoid exposure to sunlight

Please avoid long periods of sunlight or high temperature exposure.

Cleaning the screen

Using a soft clean cloth to wipe the screen is recommended; do not use ordinary tissue to wipe the screen.

Do not disassemble

Please do not disassemble the product, this may void the warranty and damage the unit.

Storage

When the product is not being used for a long period, store the device in a cool and dry place. For long-term storage, keeping the unit in a dry box is recommended.

Please do not keep the product in the following environments:

- Unventilated and humid locations.
- In a car window that is exposed to excessive amounts of sunlight.
- In an environment where humidity is over 90%.

Specifications

GPS Chip	Chipset: MTK 3329
Dimensions	81.7x 54x 22 mm
Weight	84g
Battery	Rechargeable 1050 mAh lithium battery
Power	DC5V/1A
Button	2 buttons : Menu / Power + 5 Direction keys
Antenna	Built-in patch antenna
IO Interface	Mini USB
Display	High-contrast electro-luminescent backlit display, 4-level grayscale LCD. Dimensions: 33.5 × 33.5 mm, 1.5" Resolution: 128 x 128 pixels
Environmental Temperature	Operating Temperature: -10℃ to 60℃ Storage Temperature: -20℃ to 70℃ Battery Recharging Temperature: 0℃ ~40℃
Water proof	IPX7